


Flat Panels

Eco Series 2x2 and 2x4 Flat Panels with COLOR PREFERENCE® Technology

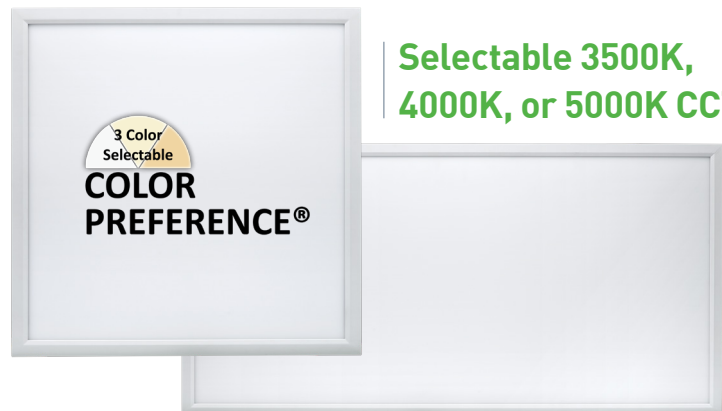

Selectable 3500K, 4000K, or 5000K CCT

ECO

2x2 and 2x4 Flat Panels New ETi "Back Lit" Technology

Innovative design delivers high energy savings in a lightweight, easy-to-handle design

ETi ADVANTAGE



- ✓ COLOR PREFERENCE Technology – 3CCT Selectable
- ✓ Higher energy savings with 110 LPW efficacy
- ✓ Lightweight design allows easy handling and installation
- ✓ 0-10V Dimmable
- ✓ Install in grid or suspension mount!
- ✓ Shatter resistant diffusing lens delivers even light distribution with no hot-spots


AVAILABLE MODELS

Features & Specifications

- Wide 120° beam angle
- 120-277V
- >80CRI
- 0-10V Dimmable
- Temp rating -4°F-113°F
- L70 >50,000
- 5 year limited warranty



2' x 2' ECO Flat Panel
 30w LED-3300 LM
 w/ 3 CCT Color Preference®
 FPCP-2x2-3300LM-8-CP3-MV-LVD
 64204301

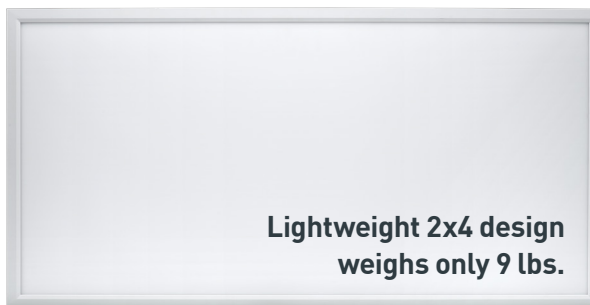

Lightweight 2x4 design weighs only 9 lbs.

2' x 4' ECO Flat Panel
 45w 4950 LM
 w/ 3 CCT Color Preference®
 FPCP-2x4-4950LM-8-CP3-MV-LVD
 64205401

PART NUMBER GUIDE

CATEGORY	SIZE	LUMENS	CRI	CCT	VOLTAGE	DIMMING
FPCP			8	CP3	MV	LVD

PRODUCT/SKU DETAILS

GENERAL SPECIFICATIONS:

Voltage	120-277VAC	Frequency	50/60 Hz.	CRI	80
Power Factor	>.90	THD	< 20%	Rating	ETL Damp
Temperature	-4°F to +113°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited

ORDERING GUIDE

Part #	Model #	Description	Replaces	LED Watts	Lumens	LPW	CCT	Product Dimensions	CRI	Input Voltage	Case Pack
FPCP-2x2-3300LM-8-CP3-MV-LVD	64204301	2x2 Color Preference Flat Panel, 0-10V Dimmable, 3 CCT Color Selectable	4 x 20w T8	30	3300LM	110	35/40/5000K	23.78 x 23.78 x 1.4 in.	80	120-277V	2
FPCP-2x4-4950LM-8-CP3-MV-LVD	64205401	2x4 Color Preference Flat Panel, 0-10V Dimmable, 3 CCT Color Selectable	2 x 32w T8	45	4950LM	110	35/40/5000K	47.7 x 23.7 x 1.4 in.	80	120-277V	2
95457326101		Aircraft cable for suspension mounting	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	2
FPE-SMK-22		Surface mounting kit for 2'x2' Flat Panel	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1
FPE-SMK-22		Surface mounting kit for 2'x4' Flat Panel	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1
FPI-22-42-850-MV-D	54320161	2'x2' Premium Flat Panel, 0-10V Dimmable	4 x 20w T8	42.5w	4,250	100	5000K	23.7 x 23.7 x 0.9 in.	80	120-277V	1

PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Inner Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight
FPCP-2x2-3300LM-8-CP3-MV-LVD	64204301	849489063645	50849489063640	25.7 x 3.2 x 25.7in.	11.2 lbs.	25.7 x 3.2 x 25.7in.	11.2 lbs.
FPCP-2x4-4950LM-8-CP3-MV-LVD	64205401	849489063294	50849489063299	49.7 x 3.2 x 25.7 in.	23.2 lbs.	49.7 x 3.2 x 25.7 in.	23.2 lbs.