



4 SPORTS ELITE MODELS
 400w – 52,000 Lumen
 600w – 78,000 Lumen
 1000w – 130,000 Lumen
 1200w – 156,000 Lumen
 All models include yoke
 mounting bracket

Options include Glare
 hood, slip fitter bracket,
 and HD surge arrestor



ETI ADVANTAGE



- ✓ Complete Product Assortment from 400w to 1200w + accessories
- ✓ 7 Beam angle options (options depending on model)
- ✓ Cold forged heat sink for superior heat management
- ✓ IP65 water proof rating
- ✓ 6kV integrated surge (20kV optional)
- ✓ Powder coated finish with proprietary anti-corrosion primer
- ✓ Optional laser alignment tool

Technology

- Cold-forged 1070 Aluminum heat sink design delivers unrivaled heat management
- Rugged IP65 design ensures unrivaled durability in harsh environments
- Precision-engineered optics direct light precisely where it is needed
- Robust, versatile yoke mounting bracket is designed to make installation easy.

Control


- Available in 12°, 15°, 30°, 40°, 45°, and 120° (Depending on model)
- 0-10V dimmable

Features & Specifications

- 16 Models from 400w to 1200w LED
- Yoke mounting bracket
- LED Driver bracket with IP65 connectors
- 25' whip cord
- 5000K CCT Standard
- 120-277V or 277V-480V
- >70CRI
- Temp rating -4°F - 113 °F
- L70 >50,000
- 5 Year limited warranty



Slip Fitter Bracket



Laser Alignment Tool



20kV Surge Protectors



PART NUMBER GUIDE

CATEGORY	WATTS	LUMENS	CRI	CCT	VOLTAGE	BEAM
SPLR			70	50K		XXD

PRODUCT/SKU DETAILS - STANDARD VOLTAGE

GENERAL SPECIFICATIONS:

Voltage	120-277VAC	Frequency	50/60 Hz.	CRI	70
Power Factor	>.90	THD	< 20%	Rating	cULus Wet
Temperature	-40°F to +115°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited

ORDERING GUIDE

Part #	Model #	Description	Watts	Lumens	LPW	Beam	CCT	Product Dim.	Case Pack
SLTR-400W-52KLM-7-50K-MV-30D	60502261	400W Sportlighter flood, 30° beam	400w	52,000	130	30°	5000K	21.4 x 16.1 x 15.5"	1
SLTR-400W-52KLM-7-50K-MV-40D	60505261	400W Sportlighter flood, 40° beam	400w	52,000	130	40°	5000K	21.4 x 16.1 x 15.5"	1
SLTR-400W-52KLM-7-50K-MV-120D	60504261	400W Sportlighter flood, 120° beam	400w	52,000	130	120°	5000K	21.4 x 16.1 x 15.5"	1
SLTR-600W-78KLM-7-50K-MV-15D	60501361	600W Sportlighter flood, 15° beam	600w	78,000	130	15°	5000K	26.5 x 20.5 x 20.6"	1
SLTR-600W-78KLM-7-50K-MV-40D	60505361	600W Sportlighter flood, 40° beam	600w	78,000	130	40°	5000K	26.5 x 20.5 x 20.6"	1
SLTR-1000W-130KLM-7-50K-MV-12D	60511461	1000W Sportlighter flood, 12° beam	1000w	130,000	130	12°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1000W-130KLM-7-50K-MV-30D	60502461	1000W Sportlighter flood, 30° beam	1000w	130,000	130	30°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1000W-130KLM-7-50K-MV-45D	60506461	1000W Sportlighter flood, 45° beam	1000w	130,000	130	45°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1000W-130KLM-7-50K-MV-60D	60503461	1000W Sportlighter flood, 60° beam	1000w	130,000	130	60°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-MV-15D	60511561	1200W Sportlighter flood, 12° beam	1200w	156,000	130	12°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-MV-30D	60502561	1200W Sportlighter flood, 30° beam	1200w	156,000	130	30°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-MV-40D	60505561	1200W Sportlighter flood, 40° beam	1200w	156,000	130	40°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-MV-60D	60503561	1200W Sportlighter flood, 60° beam	1200w	156,000	130	60°	5000K	28.3 x 22.5 x 22.7"	1

PRODUCT/SKU DETAILS - HIGH VOLTAGE

GENERAL SPECIFICATIONS:

Voltage	277-480VAC	Frequency	50/60 Hz.	CRI	70
Power Factor	>.90	THD	< 20%	Rating	cULus
Temperature	-40°F to +118°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited

ORDERING GUIDE


Part #	Model #	Description	Watts	Lumens	LPW	Beam	CCT	Product Dim.	Case Pack
SLTR-400W-52KLM-7-50K-HV-30D	60502661	400W Sportlighter flood, 40° beam	400w	52,000	130	30°	5000K	21.4 x 16.1 x 15.5"	1
SLTR-400W-52KLM-7-50K-HV-40D	60505661	400W Sportlighter flood, 40° beam	400w	52,000	130	40°	5000K	21.4 x 16.1 x 15.5"	1
SLTR-400W-52KLM-7-50K-HV-120D	60504661	400W Sportlighter flood, 120° beam	400w	52,000	130	120°	5000K	21.4 x 16.1 x 15.5"	1
SLTR-600W-78KLM-7-50K-HV-15D	60501761	600W Sportlighter flood, 15° beam	600w	78,000	130	15°	5000K	26.5 x 20.5 x 20.6"	1
SLTR-600W-78KLM-7-50K-HV-40D	60505761	600W Sportlighter flood, 40° beam	600w	78,000	130	40°	5000K	26.5 x 20.5 x 20.6"	1
SLTR-1000W-130KLM-7-50K-HV-12D	60511861	1000W Sportlighter flood, 12° beam	1000w	130,000	130	12°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1000W-130KLM-7-50K-HV-30D	60502861	1000W Sportlighter flood, 30° beam	1000w	130,000	130	30°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1000W-130KLM-7-50K-HV-45D	60506861	1000W Sportlighter flood, 45° beam	1000w	130,000	130	45°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1000W-130KLM-7-50K-HV-60D	60503861	1000W Sportlighter flood, 60° beam	1000w	130,000	130	60°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-HV-15D	60511961	1200W Sportlighter flood, 12° beam	1200w	156,000	130	12°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-HV-30D	60502961	1200W Sportlighter flood, 30° beam	1200w	156,000	130	30°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-HV-40D	60505961	1200W Sportlighter flood, 40° beam	1200w	156,000	130	40°	5000K	28.3 x 22.5 x 22.7"	1
SLTR-1200W-156KLM-7-50K-HV-60D	60503961	1200W Sportlighter flood, 60° beam	1200w	156,000	130	60°	5000K	28.3 x 22.5 x 22.7"	1

Accessories


SLTR-GH-SM	Glare Hood 400W	1
SLTR-GH-MD	Glare Hood 600W	1
SLTR-GH-LG	Glare Hood 1000W-1200W	1
SLTR-SF-SM	Slip Fitter Bracket 400W	1
SLTR-SF-LG	Slip Fitter Bracket 600W-1000W-1200W	1
SLTR-SP-SM	Surge Protection 400W	1
SLTR-SP-LG	Surge 600W-1000W-1200W	1
SLTR-LA-LP	Alignment Laser	1

Optional 277-480V Driver - Contact ETI for details


DIMENSIONAL LINE DRAWINGS

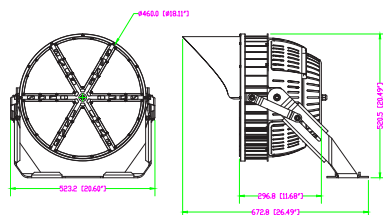

SP01 600-750W (With shield)

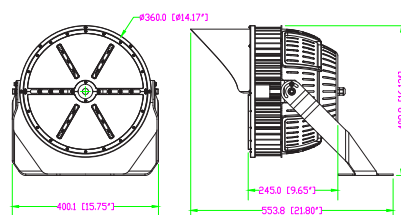

SP01 400-500W (With shield)

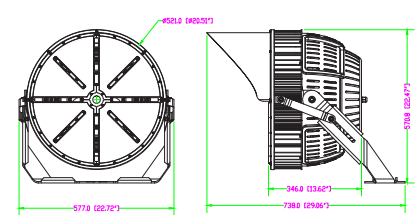

SP01 1000-1200W (With shield)

PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Product Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight	Shipper Carton Pack
SLTR-400W-52KLM-7-50K-MV-30D	60503261	849489063317	50849489063312	18.90 x 18.90 x 18.50 in.	36.5 lbs.	18.90 x 18.90 x 18.50 in.	36.5 lbs.	1
SLTR-400W-52KLM-7-50K-MV-40D	60503261	849489063324	50849489063329	18.90 x 18.90 x 18.50 in.	36.5 lbs.	18.90 x 18.90 x 18.50 in.	36.5 lbs.	1
SLTR-400W-52KLM-7-50K-MV-120D	60504261	849489063331	50849489063336	18.90 x 18.90 x 18.50 in.	36.5 lbs.	18.90 x 18.90 x 18.50 in.	36.5 lbs.	1
SLTR-600W-78KLM-7-50K-MV-15D	60503361	849489063348	50849489063336	24.80 x 22.44 x 22.24 in.	70.4 lbs.	24.80 x 22.44 x 22.24 in.	70.4 lbs.	1
SLTR-600W-78KLM-7-50K-MV-40D	60504361	849489063355	50849489063350	24.80 x 22.44 x 22.24 in.	70.4 lbs.	24.80 x 22.44 x 22.24 in.	70.4 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-12D	60504461	849489063379	50849489063374	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-30D	60505461	849489063386	50849489063381	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-45D	60506461	849489063362	50849489063367	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-60D	60507461	849489063393	50849489063398	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-15D	60504561	849489063409	50849489063404	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-30D	60505561	849489063416	50849489063411	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-40D	60506561	849489063447	50849489063442	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-60D	60507562	849489063423	50849489063428	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Product Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight	Shipper Carton Pack
SLTR-400W-52KLM-7-50K-MV-30D	60503261	849489063317	50849489063312	18.90 x 18.90 x 18.50 in.	36.5 lbs.	18.90 x 18.90 x 18.50 in.	36.5 lbs.	1
SLTR-400W-52KLM-7-50K-MV-40D	60503261	849489063324	50849489063329	18.90 x 18.90 x 18.50 in.	36.5 lbs.	18.90 x 18.90 x 18.50 in.	36.5 lbs.	1
SLTR-400W-52KLM-7-50K-MV-120D	60504261	849489063331	50849489063336	18.90 x 18.90 x 18.50 in.	36.5 lbs.	18.90 x 18.90 x 18.50 in.	36.5 lbs.	1
SLTR-600W-78KLM-7-50K-MV-15D	60503361	849489063348	50849489063336	24.80 x 22.44 x 22.24 in.	70.4 lbs.	24.80 x 22.44 x 22.24 in.	70.4 lbs.	1
SLTR-600W-78KLM-7-50K-MV-40D	60504361	849489063355	50849489063350	24.80 x 22.44 x 22.24 in.	70.4 lbs.	24.80 x 22.44 x 22.24 in.	70.4 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-12D	60504461	849489063379	50849489063374	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-30D	60505461	849489063386	50849489063381	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-45D	60506461	849489063362	50849489063367	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1000W-130KLM-7-50K-MV-60D	60507461	849489063393	50849489063398	26.77 x 24.80 x 23.03 in.	82.72 lbs.	26.77 x 24.80 x 23.03 in.	82.72 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-15D	60504561	849489063409	50849489063404	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-30D	60505561	849489063416	50849489063411	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-40D	60506561	849489063447	50849489063442	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1
SLTR-1200W-156KLM-7-50K-MV-60D	60507562	849489063423	50849489063428	22.72 x 20.04 x 22.48 in.	88 lbs.	22.72 x 20.04 x 22.48 in.	88 lbs.	1