

4' Linkable LED Strip Light

1800 lm | 120VAC | Model 54261143 | Part ST-4-20-840-SV-N

- > Energy Saving 20 Watt Integrated LED
- > Uses 87% Less Energy than Equivalent 32 Watt 1xT8 Fluorescent tube
- > Cool White 4000K CCT
- > Lasts 45 years or 50,000 Hours Continuous Use
- > Maintenance Free — No Bulb Replacements
- > 5 Year Limited Warranty
- > Suitable for use in closets, as defined in NEC® Section 410.16



SPECIFICATIONS

Model	54261143
Part	ST-4-20-840-SV-N
Description	4' Linkable LED Strip Light
Input Voltage (VAC)	120
Wattage	20W
Dimmability	Non-Dimmable
Average Rated Life ¹	50,000 hours
Typical Lumens ²	1800
CCT ³	4000K
Location Rating	UL Damp
CRI ⁴	≥80
Beam Angle	107
Operating Temperature	Min -4°F (-20° C), Max 95°F (35° C)
Power Factor	>0.9
R9	15
DUV	-0.0002
CBCP	296
Operating Frequency (Hz)	60Hz

¹ Hours lifetime with 70% lumen maintenance

² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)


⁴ Color rendering index/Ra

TO ORDER:

www.ETiSSL.com

Call: 1.855.ETi.SSLI

1.855.384.7754

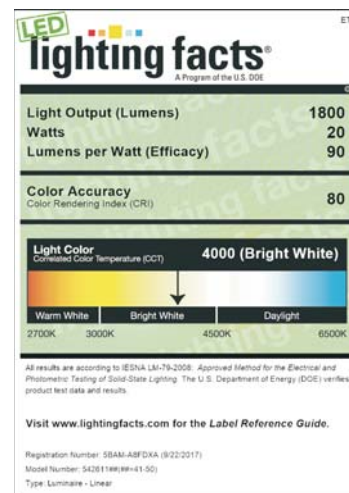



4' Linkable LED Strip Light

1800 lm | 120-277VAC | Model 54261143 | Part ST-4-20-840-SV-N

SHIPPING INFORMATION

Model	54261143
Part	ST-4-20-840-SV-N
UPC	849489002590
Product Dimensions (L x W x H in.)	48 x 1 5/8 x 2 3/8
Product Dimensions (L x W x H cm.)	122 x 4.1 x 6
Product Weight (lbs.)	3.45
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	4
Master Carton Bar Code	50849489002595
Master Carton Dimensions (L x W x H in.)	51.02 x 7.48 x 7.87
Master Carton Dimensions (L x W x H cm.)	129.6 x 19 x 20
Master Carton Weight (lbs)	16.23
Pallet Quantity	216

COMPATIBILITY

Dimmers: N/A

Sensors: N/A

AVAILABLE ACCESSORIES

Model	Part	Description	Wattage	Input Voltage	Case Pack
N/A	N/A	N/A	N/A	N/A	N/A

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: 855.384.7754
Fax: 847.383.6256