

- > Energy Saving 33 Watt Integrated LED
- > Daylight 5000K CCT
- > Battery Back-Up Compatible
- > DLC Listed
- > Lasts 45 years or 50,000 Hours Continuous Use
- > 5 Year Limited Warranty
- > Suitable for use in closets, as defined in NEC[®] Section 410.16

4' High Lumen Output Strip Light

4900 lm | 120-277VAC | Model 54583361 | Part ST-4-33-850-MV-N-EM



SPECIFICATIONS

Model	54583361
Part	ST-4-33-850-MV-N-EM
Description	4' High Lumen Output Strip Light, Compatible with Battery Back-Up
Input Voltage (VAC)	120-277
Wattage	33
Dimmability	Non-Dimmable
Average Rated Life ¹	50,000 hours
Typical Lumens ²	4900
CCT ³	5000K
Location Rating	UL Damp
CRI ⁴	≥80
Beam Angle	100
Operating Temperature	Min -4°F (-20° C), Max 95°F (35° C)
Power Factor	>0.9
R9	1
DUV	0.0030
CBCP	1140
Operating Frequency (Hz)	50/60

1 Hours lifetime with 70% lumen maintenance

2 Thermally stable typical lumens (±10%)


3 Thermally stable CCT (±10%)

TO ORDER:

www.ETiSSL.com

Call: 1.855.ETi.SSLI

1.855.384.7754

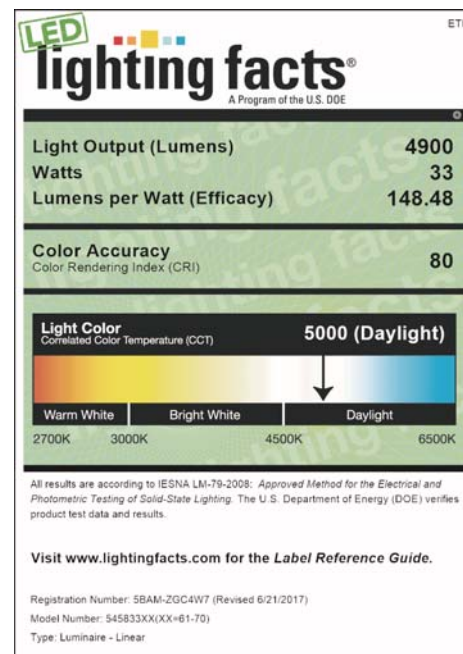



4' High Lumen Output Strip Light

4900 lms | 120-277VAC | Model 54583361 | Part ST-4-33-850-MV-N-EM

SHIPPING INFORMATION

Model	54583361
Part	ST-4-33-850-MV-N-EM
UPC	849489002989
Product Dimensions (L x W x H in.)	48 x 1 13/16 x 2 13/64
Product Dimensions (L x W x H cm.)	122 x 4.6 x 5.9
Product Weight (lbs.)	5.5
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	6
Master Carton Bar Code	50849489002984
Master Carton Dimensions (L x W x H in.)	51.34 x 8.31 x 8.82
Master Carton Dimensions (L x W x H cm.)	130.4 x 18.3 x 22.4
Master Carton Weight (lbs)	25.45
Pallet Quantity	192

COMPATIBILITY

Dimmers: N/A

Sensors: N/A

AVAILABLE ACCESSORIES

Model	Part	Description	Wattage	Input Voltage	Case Pack
90600143	N/A	Battery Back-Up	25	120-277	

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.ETiSSL.com/fcc15b

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: 855.384.7754
Fax: 847.383.6256