




- > Energy Saving 90 Watt Integrated LED
- > Cool White 4000K CCT
- > Lasts 45 years* or 50,000 Hours Continuous Use
- > 5 Year Limited Warranty

8' LED Strip Light

9000 lms | 120VAC | Ordering 54599142 | Part ST-8-90-840-SV-D

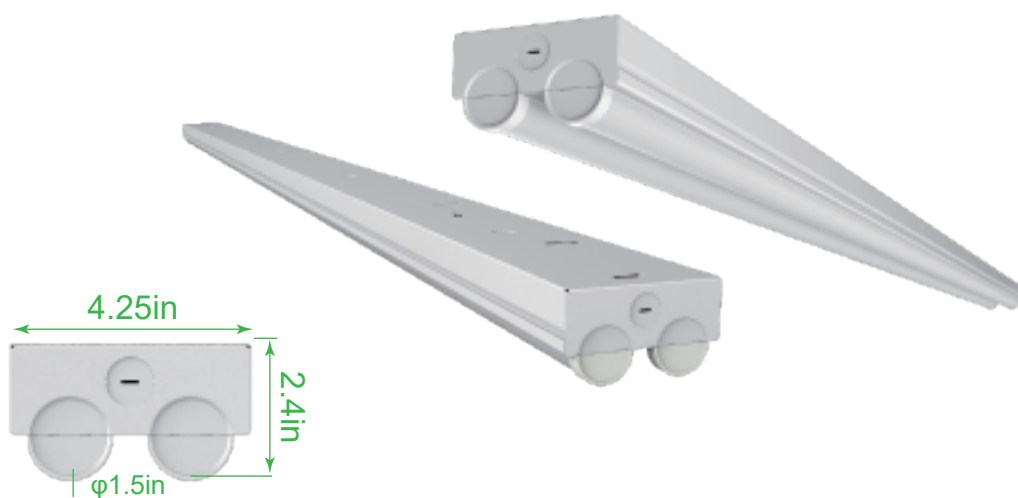

SPECIFICATIONS

Ordering	54599142
Part	ST-8-90-840-SV-D
Certification	54599142
Description	8' LED Strip Light
Input Voltage (VAC)	120V
Wattage	90W
Dimmability	Non-dimmable
Average Rated Life ¹	50,000 hours
Typical Lumens ²	9000lm
CCT ³	4000K
Location Rating	UL Damp
CRI ⁴	≥80
Beam Angle	110
Operating Temperature	Min -4°F (-20° C), Max 113°F (45° C)
Power Factor	>0.9
R9	55
DUV	-0.0032
Operating Frequency (Hz)	60Hz

¹ Hours lifetime with 70% lumen maintenance

² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)

TO ORDER:

www.ETiSSL.com

Call: 1.855.ETi.SSLI

1.855.384.7754





8' LED Strip Light

9000 lms | 120VAC | Ordering 54599142 | Part ST-8-90-840-SV-D

SHIPPING INFORMATION

Ordering	54599142
Part	ST-8-90-840-SV-D
UPC	849489060132
Product Dimensions (L x W x H in.)	95 5/8 x 4 1/4 x 2 3/8
Product Dimensions (L x W x H cm.)	243 x 11 x 6
Product Weight (lbs.)	9.48
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	2
Master Carton Bar Code	50849489060137
Master Carton Dimensions (L x W x H in.)	98 x 9 x 7
Master Carton Dimensions (L x W x H cm.)	248 x 24 x 18
Master Carton Weight (lbs)	28.22
Pallet Quantity	N/A

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.etiled.us/fcc15b

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Corporate Woods Parkway
Vernon Hills, IL 60061
Phone: 855.384.7754
Fax: 847.383.6256