

VersaStrip

4' 5500 Lumen Strip Light Two Pack The Most Versatile LED Strip Light Available!

Best 8' Strip light,
ships in 4' box



2x48" VersaStrip
Model #: 54598142
Part #: ST-4-55-840-MV-D

VersaStrip

Replaces 8' Strip, 4' Strip, or use as twin 4' 11,000 Lm Low/High Bay



ETI ADVANTAGE



- ✓ One Product = Many Mounting Solutions!
 - 4' Single strips – mounted individually
 - 2 x 4' side by side – great for low/high bay installations
 - 8' Strip – single or continuous strip up to 40'
 - Grid layout – using optional brackets
- ✓ Tandem and parallel mounting brackets included

LIGHTING CONTROL AND SAFETY



70114401 • 40w Emergency LED Driver/BBU



70114402 • 40w Emergency LED Driver/BBU



90600121 • Multi-Volt Occupancy Sensor With Daylight Sensor



90600647 • Motion Sensor, Parallel, Twin Strip Configuration Only

"Versa"-Tile Mounting Options And Locations!

- Flush or suspended mounting
- Wall or ceiling installations
- Grocery, retail, office, factory and warehouse installations - superb high/low bay or aisle lighting solution!
- Tandem and parallel mounting brackets included

Power


- 11,000 lumen output (5500 LM/4' strip)
- 120-277V

Control


- Optional motion control with 3 time settings
- 0-10V dimming

Robust, Intelligent Construction

- Shatterproof PMMA lens will not discolor over time
- Industrial grade powder coated housing
- Extra wire length included plus quick-connects for easy installation
- UL damp location rated

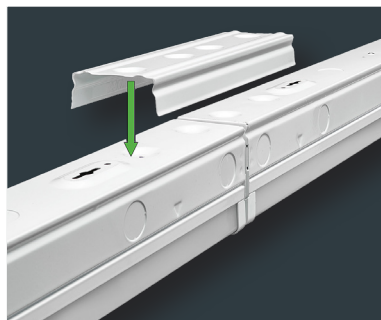

Joiner bracket snaps into place for 8 foot continuous mounting

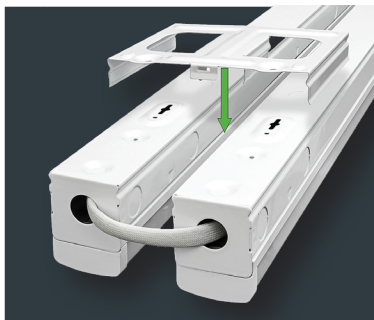

Brackets snap into place for parallel mounting



Snap on wireway covers for optional wiring

PART NUMBER GUIDE

CATEGORY	SIZE	WATTS	CRI/CCT	VOLTAGE	DIMMABILITY	UPGRADE FEATURE
ST	4	100	840	MV	D	N/A

PRODUCT/SKU DETAILS


GENERAL SPECIFICATIONS:

Voltage	120-277VAC	Frequency	50/60 Hz.	CRI	80
Power Factor	>.90	THD	< 20%	Rating	cULus Damp
Temperature	-4°F to +113°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited


ORDERING GUIDE

Part #	Model #	Description	Replaces	Watts	Lumens	LPW	CCT	Product Dim.	CRI	Input Voltage	Case Pack
ST-4-55-840-MV-D	54598142	2 x 48" VersaStrip Light - 0-10V Dimmable	400w	100w	11,000	100	4000K	48.03 x 4.17 x 2.48 in.	80	120-277V	2
Accessories											
OS-ST-01	90600647	Motion Sensor - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	4.65 x 1.50 x 2.99 in.	N/A	N/A	10
BR-ST-LL-01	90600648	L Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	7.28 x 6.69 x 0.93 in.	N/A	N/A	10
BR-ST-TL-01	90600649	T Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	11.32 x 7.28 x 0.93 in.	N/A	N/A	10
BR-ST-PL-01	90600650	Parallel Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	9.65 x 4.90 x 0.93 in.	N/A	N/A	10
BR-ST-CL-01	90600651	Cross Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	11.73 x 11.32 x 0.93 in.	N/A	N/A	10
BR-ST-AL-01	90600652	Adjustable Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	9.84 x 2.22 x 0.93 in.	N/A	N/A	10
BR-ST-CLB	90600737	Continuous Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	8.66 x 2.19 x 0.93 in.	N/A	N/A	10
BR-ST-PLB	90600738	Parallel Linking Bracket - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	4.84 x 2.64 x 1.52 in.	N/A	N/A	10
BR-ST-PC	90600739	Plastic bracket cover - Compatible with 54598142 VersaStrip	N/A	N/A	N/A	N/A	N/A	9.84 x 2.22 x 0.93 in.	N/A	N/A	10
EMUFO-40170-YY	70114401	Emergency LED Driver BBU, Hanging/Round -Compatible with 54598142 VersaStrip	N/A	40w	N/A	N/A	N/A	11 x 3.9 x 6.5 in.	N/A	100-347V	4
EMA-40FY-170	70114402	Emergency LED Driver BBU - Compatible with 54598142 VersaStrip	N/A	40w	N/A	N/A	N/A	12.4 x 2.3 x 1.5 in.	N/A	100-347V	10
N/A	90600121	External Motion Sensor - Compatible with all Strip light models	N/A	N/A	N/A	N/A	N/A	2.8 x 2.8 in.	N/A	120-277V	4


OPTIONAL BRACKETS




X BRACKET



MULTI-ANGLE ADJUSTABLE





T BRACKET




L BRACKET

QUICK CONNECTORS ALLOW FOR EASY INSTALLATION


OPTIONAL BRACKETS

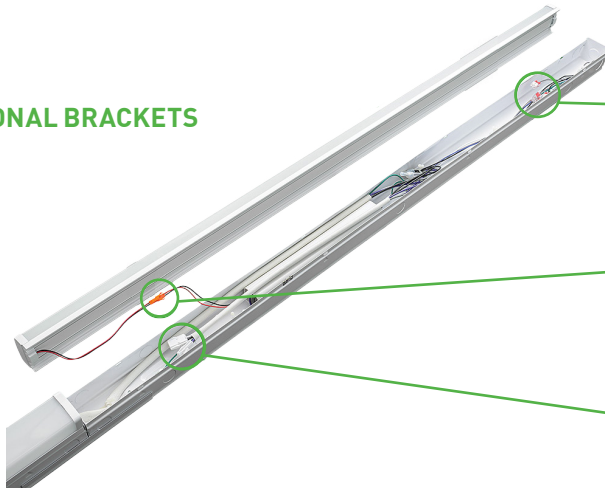

**Multi-voltage wiring
with quick connectors**



**Lamp detaches for
easy installation**



**Link additional fixtures
easily with installed
wiring harness**

PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Inner Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight	Shipper Carton Qty.
ST-4-55-840-MV-D	54598142	849489060125	50849489060120	49.5 x 6.2 x 5.4 in.	11.2 lbs.	50.1 x 11.3 x 6.9 in.	22.62 lbs.	2
Accessories								
OS-ST-01	90600647	849489060637	50849489060632	N/A	N/A	10.9 x 9.8 x 4.4 in.	2.9 lbs.	10
BR-ST-LL-01	90600648	849489060026	50849489060021	N/A	N/A	14.4 x 6.1 x 8.0 in.	3.7 lbs.	10
BR-ST-TL-01	90600649	849489060033	50849489060038	N/A	N/A	23.4 x 6.1 x 8.1 in.	5.2 lbs.	10
BR-ST-PL-01	90600650	849489060040	50849489060045	N/A	N/A	20.4 x 20.1 x 5.7 in.	11.5 lbs.	10
BR-ST-CL-01	90600651	849489060057	50849489060052	N/A	N/A	23.4 x 6.1 x 8.1 in.	7.1 lbs.	10
BR-ST-AL-01	90600652	849489060064	50849489060069	N/A	N/A	23.4 x 6.1 x 8.1 in.	3.2 lbs.	10
BR-ST-CLB	90600737	849489063553	50849489063558	N/A	N/A	12.76 x 6.30 x 5.75 in.	2.4 lbs.	10
BR-ST-PLB	90600738	849489063560	50849489063565	N/A	N/A	16.73 x 6.54 x 2.99 in.	2.7 lbs.	10
BR-ST-PC	90600739	849489063577	50849489063572	N/A	N/A	10.51 x 9.29 x 3.35 in.	1.4 lbs.	10
N/A	90600121	849489009513	50849489009518	6.4 x 4.8 x 2.4 in.	1.1 lbs.	20.1 x 12.8 x 5.6 in.	18.7 lbs.	N/A

DIMENSIONS

