




- > Energy Saving 30 Watt Integrated LED
- > Bright White 3500k CCT
Cool White 4000k CCT
Daylight 5000k CCT
- > Lasts 45 years* or
50,000 Hours
Continuous Use
- > 5 Year Limited Warranty

2' x 2' Flat Panel, 0-10V Dimmable

3300 lms | 100-277VAC | 30 Watts

Model 64204301 | Part FPCP-2x2-3300LM-8-CP3-MV-LVD

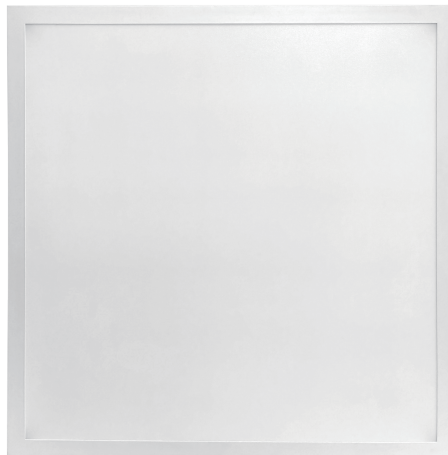

SPECIFICATIONS

Model	64204301
Part	FPCP-2x2-3300LM-8-CP3-MV-LVD
Description	2' X 2' Flat Panel, 0-10V Dimmable
Input Voltage (VAC)	100-277
Wattage	30
Dimmability	0-10V
Average Rated Life ¹	50,000 hours
Typical Lumens ²	3300lm
CCT ³	3500K/4000K/5000K
Location Rating	UL Damp
CRI ⁴	≥80
Beam Angle	120°
Operating Temperature	Min -4°F (-20° C), Max 113°F (45° C)
Power Factor	0.9
R9	N/A
DUV	N/A
CBCP	N/A
Operating Frequency (Hz)	50/60

¹ Hours lifetime with 70% lumen maintenance

² Thermally stable typical lumens (±10%)

³ Thermally stable CCT (±10%)

⁴ Color rendering index/Ra

TO ORDER:

www.ETiSSL.com

Call: 1.855.ETi.SSLI

1.855.384.7754





2' x 2' Flat Panel, 0-10V Dimmable

3300 lms | 100-277VAC | 30 Watts

Model 64204301 | Part FPCP-2x2-3300LM-8-CP3-MV-LVD

SHIPPING INFORMATION

Model	64204301
Part	FPCP-2x2-3300LM-8-CP3-MV-LVD
UPC	849489063645
Product Dimensions (L x W x H in.)	23.78 x 23.78x 1.38
Product Dimensions (L x W x H cm.)	60.4 x 60.4 x 3.5
Product Weight (lbs.)	5.06 lbs
Inner Carton Quantity	N/A
Inner Carton Bar Code	N/A
Inner Carton Dimensions (L x W x H in.)	N/A
Inner Carton Dimensions (L x W x H cm.)	N/A
Inner Carton Weight (lbs)	N/A
Master Carton Quantity	2
Master Carton Bar Code	50849489063640
Master Carton Dimensions (L x W x H in.)	25.20 x 25.39 x 6.69
Master Carton Dimensions (L x W x H cm.)	65.20 x 8.0 x 65.20
Master Carton Weight (lbs)	11.24 lbs
Pallet Quantity	N/A

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. For FCC Part 15 user information, Please see www.ETiSSL.com/fcc15b

TO ORDER:
www.ETiSSL.com
Call: 1.855.ETi.SSLI
1.855.384.7754

ETi Solid State Lighting, Inc.
720 Northgate Parkway
Wheeling, IL 60090
Phone: 855.384.7754
Fax: 847.383.6256