


# Flat Panels

# Eco Series 2x2 and 2x4 Flat Panels with COLOR PREFERENCE® Technology

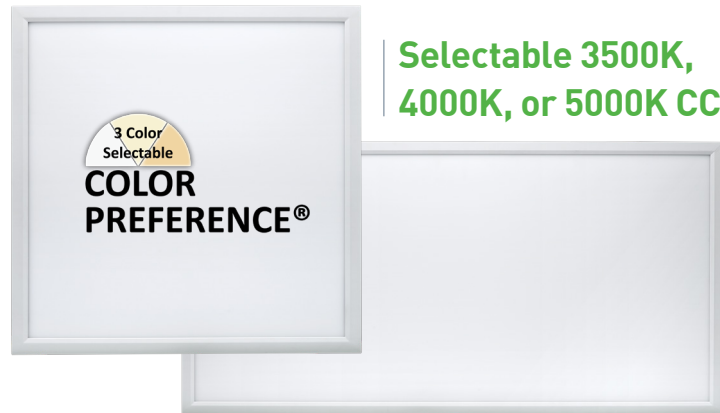

Selectable 3500K, 4000K, or 5000K CCT

# ECO

## 2x2 and 2x4 Flat Panels New ETi "Back Lit" Technology

Innovative design delivers high energy savings in a lightweight, easy-to-handle design.

## ETi ADVANTAGE



- ✓ COLOR PREFERENCE® Technology – 3CCT Selectable
- ✓ Lightweight design allows easy handling and installation
- ✓ Install in grid or suspension mount!
- ✓ Higher energy savings with 110 LPW efficacy
- ✓ 0-10V Dimmable

- ✓ Shatter resistant diffusing lens delivers even light distribution with no hot-spots

### LIGHTING CONTROL AND SAFETY



70112202 • 25w  
Emergency LED  
Driver/BBU



70114402 • 40w  
Emergency LED  
Driver/BBU


### AVAILABLE MODELS

#### Features & Specifications

- Wide 120° beam angle • 120-277V • >80CRI • 0-10V Dimmable • Temp rating -4°F - 113°F
- L70 >50,000 • 5 year limited warranty



**2' x 2' ECO Flat Panel**  
30w LED-3300 LM  
w/ 3 CCT Color Preference®  
FPCP-2x2-3300LM-8-CP3-MV-LVD  
64204301

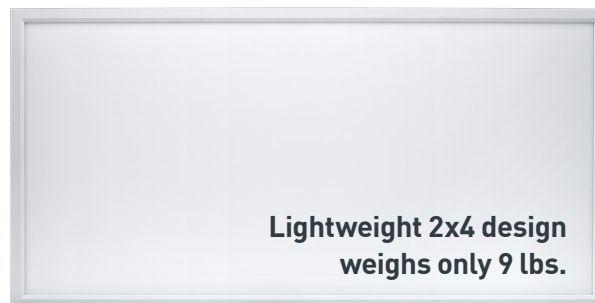

Lightweight 2x4 design  
weighs only 9 lbs.

**2' x 4' ECO Flat Panel**  
45w 4950 LM  
w/ 3 CCT Color Preference®  
FPCP-2x4-4950LM-8-CP3-MV-LVD  
64205401

## PART NUMBER GUIDE

CATEGORY	SIZE	LUMENS	CRI	CCT	VOLTAGE	DIMMING
FPCP			8	CP3	MV	LVD

## PRODUCT/SKU DETAILS

### GENERAL SPECIFICATIONS:

Voltage	120-277V	Frequency	50/60 Hz.	CRI	80
Power Factor	>.90	THD	< 20%	Rating	ETL Damp
Temperature	-4°F - 113°F	Rated Life	50,000 hrs.	Warranty	5 Year Limited

## ORDERING GUIDE

Part #	Model #	Description	Replaces	LED Watts	Lumens	LPW	CCT	Product Dimensions	CRI	Input Voltage	Case Pack
FPCP-2x2-3300LM-8-CP3-MV-LVD	64204301	2x2 ECO Color Preference Flat Panel, 0-10V Dimmable, 3 CCT Color Selectable	4 x 20w T8	30w	3300	110	3500K/4000K/5000K	23.8 x 23.8 x 1.4 in.	80	120-277V	2
FPCP-2x2-3300LM-8-CP3-MV-LVD-1pk	64204302	2x2 ECO Color Preference Flat Panel, 0-10V Dimmable - 1 Pack - NEW	4 x 20w T8	30w	3300	110	3500K/4000K/5000K	23.8 x 23.8 x 1.4 in.	≥80	120-277V	1
FPCP-2x4-4950LM-8-CP3-MV-LVD	64205401	2x4 ECO Color Preference Flat Panel, 0-10V Dimmable, 3 CCT Color Selectable	4 x 32w T8	45w	4950	110	3500K/4000K/5000K	47.7 x 23.8 x 1.4 in.	80	120-277V	2
FPCP-2x4-4950LM-8-CP3-MV-LVD-1pk	64205402	2x4 ECO Color Preference Flat Panel, 0-10V Dimmable - 1 Pack - NEW	4 x 32w T8	45w	4950	110	3500K/4000K/5000K	47.7 x 23.8 x 1.4 in.	≥80	120-277V	1

## ACCESSORIES

Part #	Model #	Description	Replaces	LED Watts	Lumens	LPW	CCT	Product Dimensions	CRI	Input Voltage	Case Pack
BLD-AM08N	70101101	Universal wattage BBU for Non-isolated Driver, Ni-MH Battery illumination time > 90 minutes, recharge time > 24 hours - Compatible with 64201131, 64200142, 64200162, 64201231	N/A	8w Max Output	N/A	N/A	N/A	2.0 x 1.8 x 9.3 in.	N/A	100-277V	1
EMA-25FY-170	70112202	Emergency LED Driver/BBU - Compatible with 54263143, 54261143, 54260144	N/A	25w	N/A	N/A	N/A	12.4 x 2.3 x 1.5 in.	N/A	100-347V	10
EMA-40FY-170	70114402	Emergency LED Driver/BBU - Compatible with 54283144, 54573161, 54583361	N/A	40w	N/A	N/A	N/A	12.4 x 2.3 x 1.5 in.	N/A	100-347V	10
N/A	70302105	2'x2' ECO Flat Panel Surface Mounting Kit - Compatible with 64204301 and 64204302	N/A	N/A	N/A	N/A	N/A	24.2 x 24.2 x 2.4 in.	N/A	N/A	6
N/A	70302106	2'x4' ECO Flat Panel Surface Mounting Kit - Compatible with 64205401 and 64205402	N/A	N/A	N/A	N/A	N/A	48 x 24 x 2.4 in.	N/A	N/A	4
N/A	95457326101	Aircraft cable for flat panels - Compatible with all models	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	1
N/A	90600019	Earthquake Clip Kit (10-pack, 4 clips/pk) - Compatible with all models	N/A	N/A	N/A	N/A	N/A	1.57 x 0.91 x 1.18 in.	N/A	N/A	10

## PACKAGING SPECIFICATIONS

Part #	Model #	UPC	UCC	Inner Carton Dimensions	Inner Carton Weight	Shipper/Master Carton Dimensions	Shipper/Master Carton Weight
FPCP-2x2-3300LM-8-CP3-MV-LVD	64204301	849489063645	50849489063640	25.7 x 3.2 x 25.7 in.	11.2 lbs.	25.7 x 3.2 x 25.7 in.	11.2 lbs.
FPCP-2x2-3300LM-8-CP3-MV-LVD-1pk	64204302	849489063669	50849489063664	25.7 x 2.4 x 25.7 in.	6.2 lbs.	25.7 x 2.4 x 25.7 in.	6.2 lbs.
FPCP-2x4-4950LM-8-CP3-MV-LVD	64205401	849489063294	50849489063299	49.7 x 3.2 x 25.7 in.	23.2 lbs.	49.7 x 3.2 x 25.7 in.	23.2 lbs.
FPCP-2x4-4950LM-8-CP3-MV-LVD-1pk	64205402	849489063676	50849489063671	49.7 x 2.4 x 25.7 in.	14.1 lbs.	49.7 x 2.4 x 25.7 in.	14.1 lbs.