

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## VT SERIES 4' VAPOR TIGHT HYBRID NARROW WIDTH (Less than 2.5")

Lumens 3737 | Efficacy up to 118

### KEY FEATURES

ETI's 4-FT strip-style Vapor Tight Hybrid luminaire is weatherproof and rated IP65 so it is dust tight and protected against projected water. Fixture can be hard wired or used with included plug-in cord, and can be mounted suspended, surface and up to 8 units can be linked together.

### CCT & Light Quality

- 4000K, 80+ CRI

### Light Output & Efficacy

- 3737 Delivered Lumens
- Efficacy Rating of 118 LPW
- 87.32% lumen maintenance @ 54,000 hours and projected L70 @ 138,000 hours

### SPECIFICATIONS

#### Construction

- Integrated, molded polycarbonate housing and lens
- Airtight seal prevents moisture and dirt from compromising the housing and damaging interior wires and components

#### Optics

- Non-yellowing high-impact resistant polycarbonate lens
- Frosted diffuser delivers even illumination and diminished glare

#### Installation


- Suspension and surface mounting kits included
- Link together up to 8 luminaires
- Hard wire or use included plug-in cord

#### Electrical

- 138,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 50/60 Hz
- Non-Dimmable

#### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://ETISSL.com/warranty/)

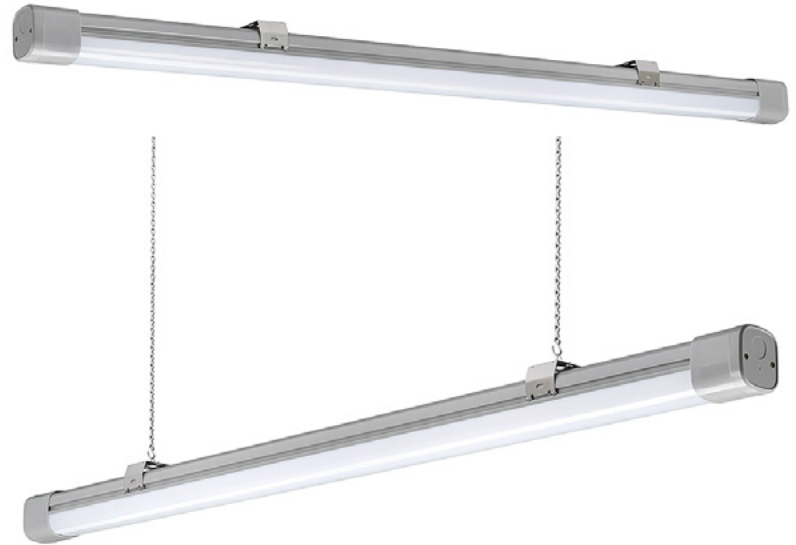

Hard wire or  
use included  
plug-in cord



KEY DATA	
Lumens	3737
Wattage	31.7
Efficacy (LPW)	117.8
Reported Life (Hours)	L70 / 138,000


### Certifications & Test Data

- All luminaires are built to UL standards and have the appropriate UL labels and information on product
- Wet location—IP65 Rated
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- ENERGY STAR® rated (See Page 2 for search info.)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



# VT SERIES 4' VAPOR TIGHT HYBRID 3737 LUMENS | EFFICACY UP TO 118

## CATALOG LOGIC

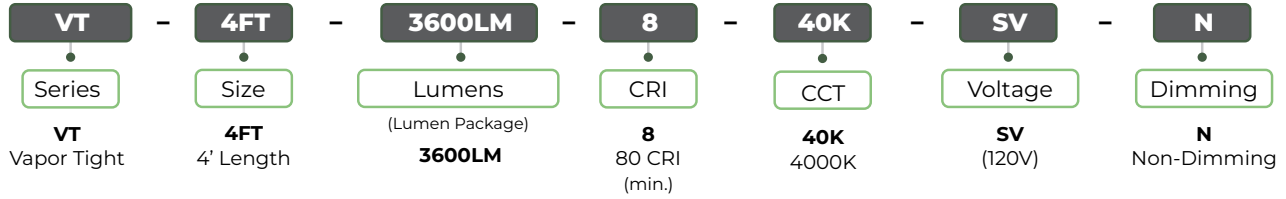


## STANDARD STOCK ORDERING INFORMATION <sup>1</sup> (typical 2-3 day shipment lead time)

Catalog Part Number	Order Number	Description	Lumen Package	Delivered Lumens <sup>2</sup>	Nominal Wattage	Efficacy	CCT	CRI	Voltage	Dim	ENERGY STAR <sup>®</sup>
VT-4FT-3600LM-8-40K-SV-N	56574142	4' Vapor Tight, 4000K	3600	3737	32	118	4000K	80+	120V	Non-Dim	Yes Search: 565741##


Notes: 1. Stock SKUs typically ship in 24-48 hours upon receipt of an approved released order  
 2. For more delivered lumens and test data see on page 3, or visit ETISSL.com

## MOUNTING


Surface Mount



Suspension Mount

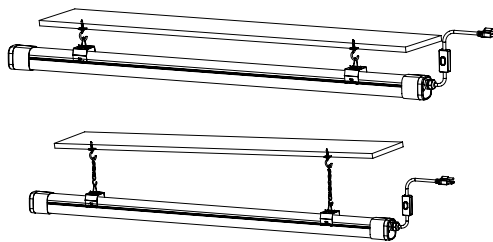

Link up to 8 fixtures




### Included with the product



- Mounting Screws
- Dry Wall Anchors
- U Brackets
- V Clips
- 2 Suspension Chains
- S Hooks

## DIMENSIONS / DETAILS

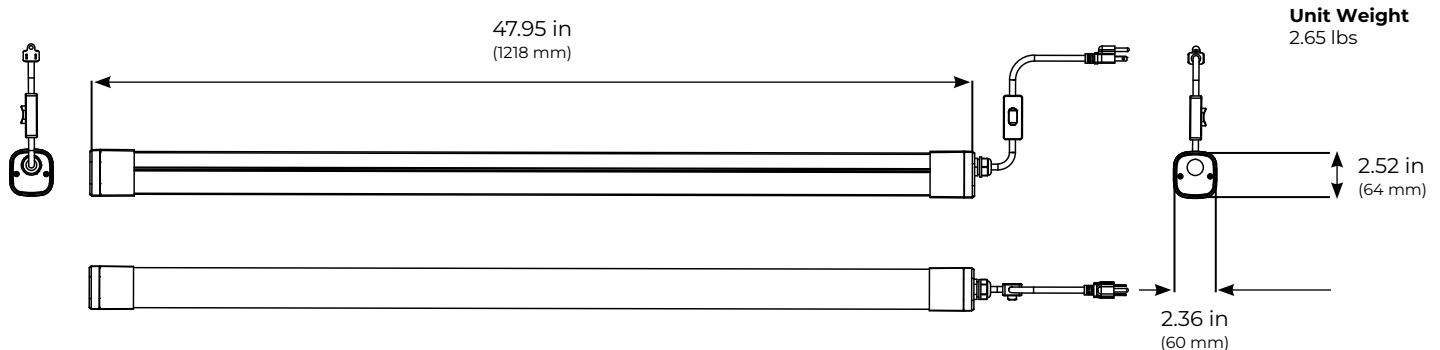

## PERFORMANCE / Data

### Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	87.32%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	138,000

### Load Information

<b>Power Factor</b>	> 0.90
<b>THD</b>	< 20%
<b>Frequency</b>	50/60 Hz
<b>Sound Rating</b>	< 20 dBA
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 45° C (113° F)

## PHOTOMETRIC SAMPLE



### Luminaire Data: 4000K

CCT & CRI	<b>4000K, 80+ CRI</b>
Initial Delivered Lumens	<b>3737</b>
Wattage	<b>31.7W</b>
Efficacy	<b>117.8</b>
Beam Angle	<b>50% = 126.8° 10% = 170.6°</b>
Spacing	<b>0° = 1.36 90° = 1.30</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

### Indoor Candela Plot

