

|            |          |
|------------|----------|
| DATE:      | PROJECT: |
| TYPE:      | NOTES:   |
| CATALOG #: |          |

## VPK | VERSAPAK WALL PACK

WITH ADJUSTABLE HEAD

3 LumenBoost® | 3 CCT Color Preference®

### KEY FEATURES

ETI's VersaPak wall packs offer ultimate flexibility with 3 Selectable Wattages and 3 Selectable CCTs, an adjustable tilting head between 0-90 degrees, and a dusk-to-dawn photocell with enable/disable feature. VersaPak puts light where and when it's needed most.

#### CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 80+ CRI

#### Light Output & Efficacy

- 3 Lumen Packages and 3 Lumen Boost Levels:
  - Lumen Package 1:** 1900 – 4050 lm
  - Lumen Package 2:** 3900 – 6750 lm
  - Lumen Package 3:** 6600 – 10800 lm
- Efficacy: Up to 157 LPW

#### Dimming, Voltage, Controls

- Integrated 0-10V dimming
- Universal voltage (120–277V), 50/60Hz
- Dusk to Dawn Photocell w/ enable disable standard

### SPECIFICATIONS

#### Construction

- Corrosion resistant, rugged die-cast aluminum housing with bronze powder coat paint finish
- Hinged housing allows for easy access to wiring, wattage and CCT select

#### Optics

- Type 2 distribution
- 3 Selectable Lumen Packages from 1900 to 110800 Lumens at highest wattage
- PMMA TIR (Total Internal Reflectance Lens) provides diffused, uniform light quality

#### Electrical, Operating Temp.

- Universal 120-277 VAC input voltage.
- Power factor >90%, THD <20%
- Operating Temperature Range: -40° C (-40° F) / 50° C (122° F)

#### Warranty

- Five-year limited warranty

| KEY DATA              |                |
|-----------------------|----------------|
| Delivered Lumen Range | 2172 – 11442   |
| Wattage Range         | 14.4 – 81.3    |
| Efficacy Range (LPW)  | 125 – 157      |
| Reported Life (Hours) | L70 / > 60,000 |



**Hinged Access**  
for wiring,  
Wattage & CCT  
select access



**Photocell**  
w/cover + enable  
disable capability



**DUSK  
TO  
DAWN**



**Color  
Preference®**


**3 LUMEN  
BOOST®**

#### Certifications & Test Data

- UL/cUL listed and built for wet location
- IP65 Rated
- DLC Premium (all lumen packages), refer to [www.designlights.org](http://www.designlights.org) for details



ORDERING GUIDE

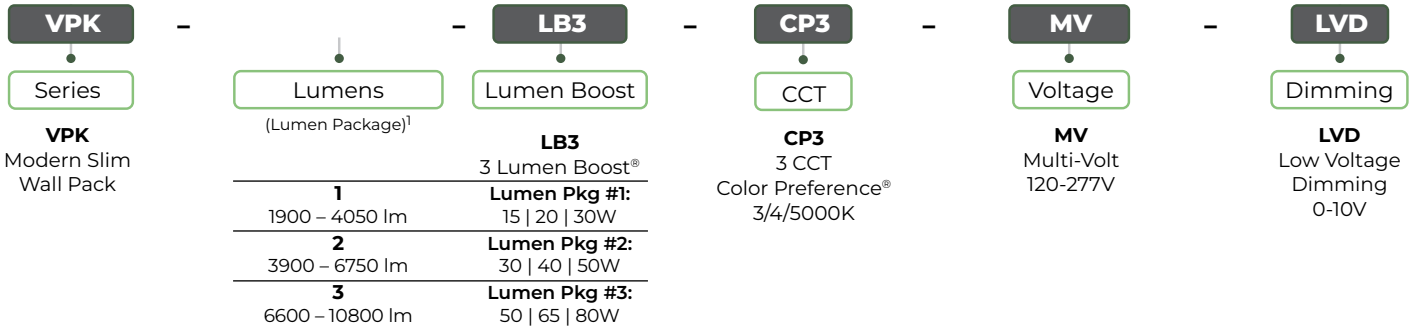

Notes: 1. Lumen package gives nominal range. See below for delivered lumen data.

STOCK ORDERING INFORMATION

| Catalog Part Number  | Order Number | Description   | CRI | CCT (CP3) | Wattage Level | Delivered Lumens <sup>1</sup> | LPW | Volt.    | Dim   | DLC <sup>2</sup> |
|----------------------|--------------|---|-----|-----------|---------------|-------------------------------|-----|----------|-------|------------------|
| VPK-1-LB3-CP3-MV-LVD | 61507101     | VersaPak, Lumen Pkg 1, Photocell with Enable/Disable Switch, Bronze | 70+ | 3000K     | 30            | 3828                          | 131 | 120-277V | 0-10V | Premium          |
|                      |              |   |     |           | 20            | 2859                          | 140 |          |       |                  |
|                      |              |   |     |           | 15            | 2172                          | 145 |          |       |                  |
|                      |              |   |     | 4000K     | 30            | 4126                          | 148 |          |       |                  |
|                      |              |   |     |           | 20            | 3070                          | 155 |          |       |                  |
|                      |              |   |     |           | 15            | 2244                          | 156 |          |       |                  |
|                      |              |   |     | 5000K     | 30            | 4040                          | 136 |          |       |                  |
|                      |              |   |     |           | 20            | 2986                          | 145 |          |       |                  |
|                      |              |   |     |           | 15            | 2216                          | 150 |          |       |                  |
| VPK-2-LB3-CP3-MV-LVD | 61508101     | VersaPak, Lumen Pkg 2, Photocell with Enable/Disable Switch, Bronze | 70+ | 3000K     | 50            | 6799                          | 125 | 120-277V | 0-10V | Premium          |
|                      |              |   |     |           | 40            | 5275                          | 134 |          |       |                  |
|                      |              |   |     |           | 30            | 4148                          | 138 |          |       |                  |
|                      |              |   |     | 4000K     | 50            | 7460                          | 144 |          |       |                  |
|                      |              |   |     |           | 40            | 5712                          | 150 |          |       |                  |
|                      |              |   |     |           | 30            | 4454                          | 153 |          |       |                  |
|                      |              |   |     | 5000K     | 50            | 7273                          | 135 |          |       |                  |
|                      |              |   |     |           | 40            | 5578                          | 143 |          |       |                  |
|                      |              |   |     |           | 30            | 4440                          | 149 |          |       |                  |
| VPK-3-LB3-CP3-MV-LVD | 61508201     | VersaPak, Lumen Pkg 3, Photocell with Enable/Disable Switch, Bronze | 70+ | 3000K     | 80            | 10747                         | 132 | 120-277V | 0-10V | Premium          |
|                      |              |   |     |           | 65            | 8871                          | 137 |          |       |                  |
|                      |              |   |     |           | 50            | 7165                          | 142 |          |       |                  |
|                      |              |   |     | 4000K     | 80            | 11442                         | 148 |          |       |                  |
|                      |              |   |     |           | 65            | 9527                          | 153 |          |       |                  |
|                      |              |   |     |           | 50            | 7655                          | 157 |          |       |                  |
|                      |              |   |     | 5000K     | 80            | 10831                         | 133 |          |       |                  |
|                      |              |   |     |           | 65            | 9156                          | 140 |          |       |                  |
|                      |              |   |     |           | 50            | 7519                          | 148 |          |       |                  |

Notes: 1. For more delivered lumens, download ies files from ETISSL.com  
 2. DLC search by catalog part number

IES Pkg 1

IES Pkg 2

IES Pkg 3

# VersaPak Wall Pack WITH ADJUSTABLE HEAD | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®


## LUMINAIRE DETAILS

Cutoff degree adjuster

Photocell cover


Conduit entry

Hinged wiring, wattage select, and CCT select access

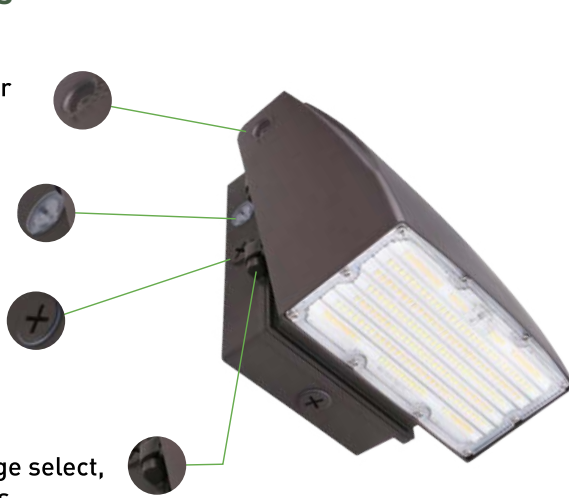

### Adjustable Head for Fine-Tuned Distribution

VersaPak has an adjustable head that can pivot from 0° to 90°




### Dark Sky Compatible\*

VersaPak can be utilized in dark sky compliant plans when kept at 0° and set to 3000K.



## DIMENSIONS / DETAILS

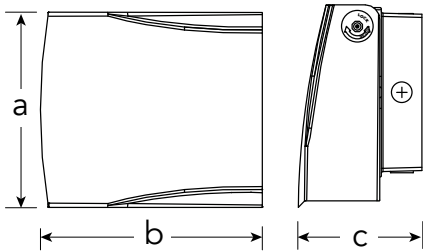

| Lumen Pkg. | a    | b    | c     | weight    |
|------------|------|------|-------|-----------|
| 1          | 6.4" | 7.3" | 4.5"  | 3.00 lbs. |
| 2 & 3      | 7.7" | 8.9" | 5.55" | 4.85 lbs. |

Factory settings:  
5000K / Highest Wattage

## PERFORMANCE / Data

### Lumen Maintenance

| Ambient Temp. | TM-21 Lumen Maintenance (54,000 hours) |
|---------------|--|
| 25° C (77° F) | 89.37%                                 |
| Ambient Temp. | TM-21 Theoretical L70 (hours)          |
| 25° C (77° F) | >60,000                                |

### Load Information

|                                  |                                  |
|----------------------------------|----------------------------------|
| <b>Power Factor</b>              | ≥0.9                             |
| <b>THD</b>                       | ≤20%                             |
| <b>Frequency</b>                 | 50/60 Hz                         |
| <b>Operating Humidity</b>        | 20% - 90% RH                     |
| <b>Low Temp Start / Max Temp</b> | -40° C (-40° F) / 50° C (122° F) |

## DISTRIBUTION

TYPE II

