

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

CWPK | FULL CUTOFF WALL PACK

WITH DUSK-TO-DAWN PHOTOCELL
3 Lumen Boost® | 3 CCT Color Preference®

KEY FEATURES

ETi SSL's full cutoff design maximizes light distribution and application spacing, while eliminating uplight. It features a Dusk-to-Dawn photocell w/ enable/disable capability, three selectable CCTs and three selectable wattages—giving you flexibility and efficiency.

CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 80+ CRI

Light Output & Efficacy

- 3 Lumen Packages and 2 Lumen Boost Levels:
Lumen Package 1: 2800 – 8600 lm
Lumen Package 2: 8400 – 14000 lm
- Efficacy: Up to 152 LPW

Dimming, Voltage, Controls

- Integrated 0-10V dimming
- Universal voltage (120-277V), 50/60Hz
- Dusk to Dawn Photocell w/ enable/disable standard

SPECIFICATIONS

Construction

- Corrosion resistant, rugged die-cast aluminum housing with bronze powder coat paint finish
- Hinged housing allows for easy access to wiring, photocell, wattage and CCT select

Optics

- Type 4 distribution
- 2 Selectable Lumen Packages from 8600 to 14000 Lumens at highest wattage
- PMMA TIR (Total Internal Reflectance Lens) provides diffused, uniform light quality

Electrical, Operating Temp.

- Universal 120-277 VAC input voltage, 50/60Hz
- Power factor >90%, THD <20%
- Operating Temperature Range: -40° C (-40° F) / 50° C (122° F)
 Sensor Temperature Range: -25 C° TO 50 C° (-13° F) / 50° C (122° F)

Warranty

- Five-year limited warranty

KEY DATA	
Delivered Lumen Range	2948 – 13856
Wattage Range	19.4 – 104.3
Efficacy Range (LPW)	120 – 152
Reported Life (Hours)	L70 / > 50,000



Hinged Access
for wiring,
Wattage & CCT
select access



Photocell
w/cover
+ enable
disable
capability



**DUSK
TO
DAWN**



**Color
Preference®**

**3 LUMEN
BOOST®**

Certifications & Test Data


- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to www.designlights.org for details
- Estimated > 54,000 hours LED lifespan based on IES LM-80 results and TM-21 calculations



Full Cutoff Wall Pack WITH DUSK-TO-DAWN PHOTOCELL | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

ORDERING GUIDE

OPTIONS

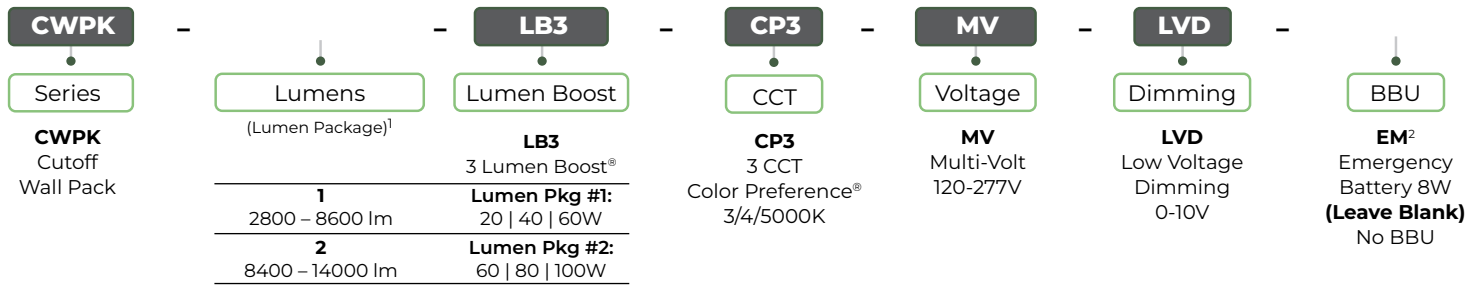

Notes:

- 1. Lumen package ranges are approximate values. For actual delivered lumen data, please see below.
- 2. BBU options are MTO only, longer lead times apply.

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	CRI	CCT (CP3)	Wattage Level	Delivered Lumens ¹	LPW	Volt.	Dim	Bug Rating ²			DLC ³
										B	U	G	
CWPK-1-LB3-CP3-MV-LVD	61511101	Cutoff Wall Pack, Lumen Package 1	80+	3000K	60	8255	132	120-277V	0-10V	2	0	2	Premium
					40	5661	142						
					20	2948	148						
					60	8578	142						
					40	5826	149						
					20	2955	152						
					60	7806	120						
					40	5482	134						
					20	2880	144						
CWPK-2-LB3-CP3-MV-LVD	61512101	Cutoff Wall Pack, Lumen Package 2	80+	3000K	100	13242	131	120-277V	0-10V	3	0	2	Premium
					80	10924	135						
					60	8545	141						
					100	13856	142						
					80	11427	146						
					60	8888	150						
					100	12658	121						
					80	10647	128						
					60	8466	136						

- Notes: 1. For more delivered lumens, download ies files from ETISSL.com
 2. BUG rating based on highest wattage level @4000K. See ies files for more data
 3. DLC search by catalog part number

MADE-TO-ORDER PRODUCT INFO (Longer lead times apply. Contact ETi for details.)

Catalog Part Number	Order Number	Description
CWPK-1-LB3-CP3-MV-LVD-EM	61511101-EM	Cutoff Wall Pack, Lumen Package 1 with 8W Battery Backup
CWPK-2-LB3-CP3-MV-LVD-EM	61512101-EM	Cutoff Wall Pack, Lumen Package 2 with 8W Battery Backup



ETI Solid State Lighting
 720 Northgate Parkway, Wheeling, IL 60090 | TEL: 1.855.384.7754
 E-mail: ETIorders@ETISSL.com | ETISSL.com

All specifications are subject to change without notice.
 All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
 Actual performance can vary slightly as a result of end-user application & environment.

IES Pkg 1

IES Pkg 2

Full Cutoff Wall Pack WITH DUSK-TO-DAWN PHOTOCELL | 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

BBU ACCESSORIES¹

Catalog Part Number	Model Number	Description
WPK-EM	70124101	Cutoff Wall Pack 8W Emergency Battery

Notes: 1. Accessories are field installed. For Factory installed items, see Made-to-Order Products on page 3.

LUMINAIRE DETAILS



Full cutoff design

Hinged housing for wiring, wattage and CCT select access




Photocell cover



Dark Sky Compatible*

Full Cutoff Wall Pack can be utilized in dark sky compliant plans when set to 3000K.

DIMENSIONS / DETAILS



Lumen Pkg.	a	b	c	weight
1	6.02"	9.84"	8.07"	5.07 lbs.
2	6.42"	12.83"	9.57"	7.05 lbs.

Factory settings:
5000K / Highest Wattage

PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	87.80%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	>54,000

Load Information

Power Factor	≥0.9
THD	≤20%
Frequency	50/60 Hz
Operating Humidity	20% - 90% RH
Low Temp Start / Max Temp	-40° C (-40° F) / 50° C (122° F)

DISTRIBUTION

TYPE IV

