

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

SCNP | SLIM CANOPY

3 Lumen Boost® | 3 CCT Color Preference®

KEY FEATURES

ETi SSL's Slim Canopy luminaire has a small footprint and offers sufficient light coverage, helping provide a safe, well-lit environment. The 3 selectable wattages and CCTs, IP65, wet location rating, and bronze or white finishes make this canopy a practical and versatile outdoor lighting solution for various applications.

CCT & Light Quality

- 3 Selectable CCTs (3000K, 4000K, 5000K)
- 80+ CRI

Light Output & Efficacy

- Lumen Boost Levels: 25/40/60W
- **Lumen Package:** 3800 – 7600 lm
- Efficacy: Up to 156 LPW

Dimming, Voltage, Controls

- Integrated 0-10V dimming
- Universal voltage (120–277V)

SPECIFICATIONS

Construction

- Corrosion and impact resistant, rugged die-cast aluminum housing with bronze or white powder coat paint finish
- Removable plugs for easy access to wattage and CCT select switches

Optics

- 3 Selectable Lumens, range from 3860.2 to 7652 Lumens at highest wattage
- Diffused polycarbonate lens for uniform light quality

Electrical, Operating Temp.

- Universal 120-277V, 50/60Hz
- Both drivers have a power factor >90%, THD <20%
- Operating Temperature Range: -30° C (-22° F) / 45° C (113° F)

Warranty

- Five-year limited warranty

KEY DATA	
Delivered Lumen Range	3860 – 7653
Wattage Range	19.4 – 104.3
Efficacy Range (LPW)	125 – 156
Reported Life (Hours)	L70 / > 60,000



Easy Access
to Wattage & CCT select switches



Certifications & Test Data

- UL/cUL listed and built for wet location
- IP65 Rated
- DesignLights Consortium™ Qualified and classified for DLC Standard (all lumen packages), refer to www.designlights.org for details
- Estimated > 60,000 hours LED lifespan based on IES LM-80 results and TM-21 calculations
- Impact resistant—IK10 Rated



Slim Canopy 3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

ORDERING GUIDE

							OPTIONS	
SCNP	1	LB3	CP3	MV	LVD			
Series	Lumens (Lumen Package) ¹	Lumen Boost	CCT	Voltage	Dimming	Finish Color	Sensor	
SCNP Slim Canopy	1 3800 — 7600 lm	LB3 3 Lumen Boost® Lumen Pkg #1: 25 40 60W	CP3 3 CCT Color Preference® 3/4/5000K	MV Multi-Volt 120-277V	LVD Low Voltage Dimming 0-10V	(Leave Blank) Bronze WH White	(Leave Blank) No Sensor OS² Microwave Occupancy Sensor	

Notes: 1. Lumen package ranges are approximate values. For actual lumen data, please see below.
2. Sensor is MTO only. Longer lead times apply.

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	CRI	CCT (CP3)	Wattage Level	Delivered Lumens ¹	LPW	Volt.	Dim	DLC ²
SCNP-1-LB3-CP3-MV-LVD	60603101	Slim Canopy Bronze Finish	80+	3000K	60	7000	125	120-277V	0-10V	Premium
					40	5616	133			
					25	3860	142			
SCNP-1-LB3-CP3-MV-LVD-WH	60603102	Slim Canopy White Finish		4000K	60	7653	143			
					40	6096	150			
					25	4111	156			
				5000K	60	7353	132			
					40	5980	142			
					25	4150	153			

Notes: 1. For more delivered lumens and test data visit ETISSL.com 2. DLC search by catalog part number


MADE-TO-ORDER PRODUCT INFO (Longer lead times apply. Contact ETI for details.)

Catalog Part Number	Model Number	Description
SCNP-1-LB3-CP3-MV-LVD-OS	60603101-I	Slim Canopy Bronze Finish with Microwave Occupancy Sensor
SCNP-1-LB3-CP3-MV-LVD-WH-OS	60603102-I	Slim Canopy White Finish with Microwave Occupancy Sensor

LUMINAIRE DETAILS



DIMENSIONS

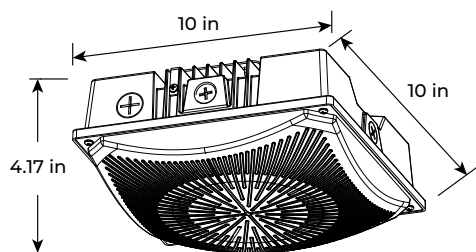

Unit Weight
6.1 lbs.

PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89.37%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 60,000

Load Information

Power Factor	≥0.9
THD	≤20%
Frequency	50/60 Hz
Operating Humidity	20% - 90% RH
Low Temp Start / Max Temp	-30° C (-22° F) / 45° C (113° F)

PHOTOMETRIC SAMPLES



Luminaire Data: at 4000K, wattage level: 60

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	7652.7
Wattage	53.40W
Efficacy	143
Max CD	2,321.9

Photometric values based on tests performed in compliance with LM-63 & LM-79

Luminaire Data: at 4000K, wattage level: 40

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	6095.8
Wattage	40.67W
Efficacy	150
Max CD	1,850.6

Luminaire Data: at 4000K, wattage level: 25

CCT & CRI	4000K, 80+ CRI
Delivered Lumens	4110.9
Wattage	26.43W
Efficacy	156
Max CD	1,248.6

Candela Plot

