

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## VLB | 24" LED VANITY LIGHT BARS

5 CCT COLOR PREFERENCE®

120-277V | Non-Dimmable

### KEY FEATURES

- Modern sleek design can be mounted vertically or horizontally
- 5 field adjustable CCTs (2700K/3000K/3500K/4000K/5000K)
- 80+ CRI
- > 54,000 hour life

### SPECIFICATIONS

#### Construction

- Contemporary sleek design
- Cold rolled steel fixture
- 3 Finish Options: Chrome, Brushed Nickel and Matte Black

#### Optics

- Polycarbonate diffused lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

#### Installation and Function

- Direct wire mount—vertical or horizontal
- Field select one of five CCTs at installation with an integral switch located on fixture. Factory set to 3000K.

#### Electrical

- 54,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60Hz
- Operating temperature: -4°F ~ 113°F
- Non-Dimmable
- ETI's patented 5 CCT COLOR PREFERENCE® allowing for easy field-adjustable color temperature selection with switch located on product

#### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)



Chrome



Brushed Nickel



Matte Black



Vertical Mount



Horizontal Mount

KEY DATA	
Lumen Range	1652 – 1745
Wattage Range	18 – 19
Efficacy Range (LPW)	87-95
Reported Life (Hours)	L70 / > 54,000




#### Certifications & Test Data

- All luminaires are built to UL standards and have the appropriate UL labels and information on product
- Damp location rated
- ENERGY STAR®
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



# 24" LED Vanity Light Bars 5 CCT COLOR PREFERENCE® | 120-277V | NON-DIMMABLE

## CATALOG LOGIC

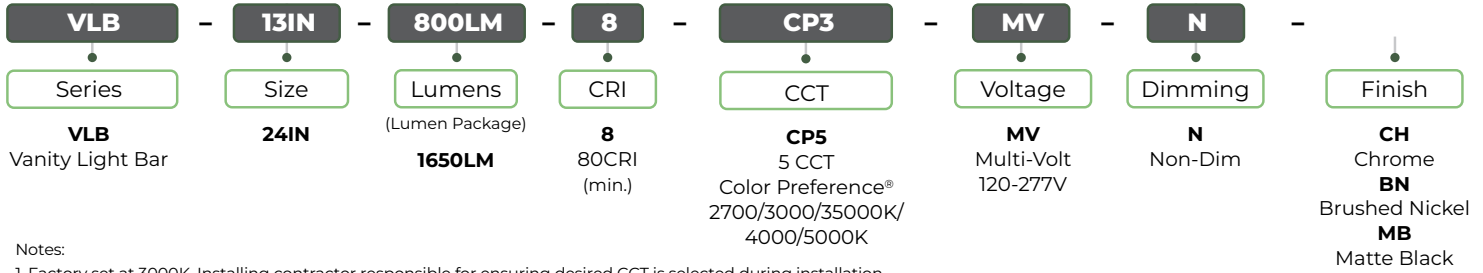


## STOCK ORDERING INFORMATION

Catalog Part Number	Order #	Product Description	Case QTY	Wattage (Nominal)	Lumen Pkg	Delivered Lumens <sup>1</sup>	Efficacy (LPW)	CCT	CRI	Volt.	Dim	ENERGY STAR®
VLB-24IN-1650LM-8-CP5-MV-N-CH	537989041	24" Vanity Light Bar with chrome finish	2	17	1650	1652	87	2700K	80+	120-277V	Non-Dim	Search: 537989XXX
						1703	93	3000K				
						1738	95	3500K				
						1745	93	4000K				
						1737	90	5000K				
VLB-24IN-1650LM-8-CP5-MV-N-BN	537989051	24" Vanity Light Bar with brushed nickel finish	2	17	1650	1652	87	2700K	80+	120-277V	Non-Dim	Search: 537989XXX
						1703	93	3000K				
						1738	95	3500K				
						1745	93	4000K				
						1737	90	5000K				
VLB-24IN-1650LM-8-CP5-MV-N-MB	537989061	24" Vanity Light Bar with matte black finish	2	17	1650	1652	87	2700K	80+	120-277V	Non-Dim	Search: 537989XXX
						1703	93	3000K				
						1738	95	3500K				
						1745	93	4000K				
						1737	90	5000K				

Notes: 1. For more delivered lumens and test data see on page 3, or visit ETISSL.com


## DIMENSIONS / DETAILS

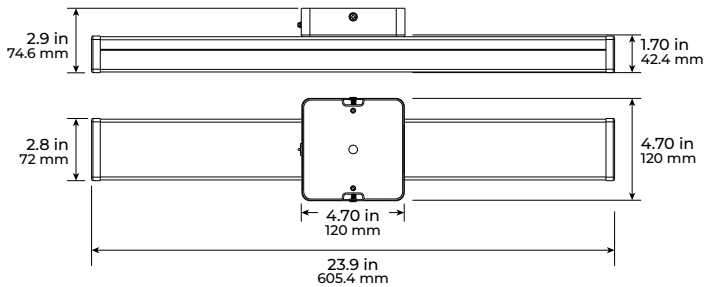

**Unit Weight**  
1.96 lbs.

## MOUNTING (Included)

Direct Wire Surface Mount included



**5 Selectable CCTs**  
Factory Set to 3000K

**PERFORMANCE / Data**

**Lumen Maintenance**

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 84.41%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 54,000

**Load Information**

<b>Power Factor</b>	>.90
<b>THD</b>	< 20%
<b>Frequency</b>	50/60 Hz
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 45° C (113° F)

**PHOTOMETRIC SAMPLE**

**Luminaire Data:** at 4000K

CCT & CRI	<b>4000K, 80+ CRI</b>
Delivered Lumens	<b>1745</b>
Wattage	<b>18.7W</b>
Efficacy	<b>93</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

