

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

ST | VERSASTRIP LIGHTS (2-PACK)

4000K VERSATILE LED STRIP LIGHTS
0-10V Dimming | Efficacy 119 LPW

KEY FEATURES

ETI's VersaStrip Lights can be installed in a wide array of configurations. Up to (8) 4' strips can be linked together to provide sufficient light coverage for large areas in multiple configurations. This makes them ideal for garages, repair shops, store aisles, open concept offices and more.

CCT & Light Quality

- CCT 4000K, CRI up to 85

Light Output & Efficacy

- High Lumen Output: 11526 lm, 119 LPW

Life

- Reported 90.79% lumen maintenance @ 54,000 hours and projected L70 @ > 60,000 hours.

Dimming, Voltage

- 0-10V Dimming, 120-277V

SPECIFICATIONS

Construction & Optics

- Cold rolled steel housing, white powder coated
- Frosted, 1mm thick polymer lens provides a uniform and soft visual appearance when in direct view with minimal LED pixelation and reduces glare

Installation

- Comes with surface and suspension mounting kits
- 1 continuous linking bracket, 2 parallel linking brackets and 2 plastic covers included
- The following brackets also available (sold separately):

Adjustable Linking Bracket
L Linking Bracket
T Linking Bracket
Parallel Linking Bracket for 3 Fixtures
Cross Linking Bracket

Electrical

- >60,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60 Hz
- 0-10V dimmable driver
- Operating temperature: -4°F to 113°F (-20°C to 45°C)
- OC/Daylight Sensor, and Motion Sensor field installed accessories available


Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.ETISSL.com/warranty/)

KEY DATA	
Lumen Range	11525
Wattage Range	97.0
Efficacy Range (LPW)	118.8
Reported Life (Hours)	L70 / > 60,000



VersaStrip



Continuous and Tandem
Linking brackets Included


Certifications & Test Data

- All luminaires are cULus listed and are built for damp location use
- Adheres to LM79, and TM30 industry standards for photometric, lumen maintenance and lifetime calculations
- DLC® (DesignLights Consortium) Qualified. Please refer to DLC for specific product qualifications at www.designlights.org (see search info on page 2)
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



4' VERSASTRIP 2-PACK VERSATILE STRIP LIGHTS | 4000K | 11526 DELIVERED LUMENS

CATALOG LOGIC

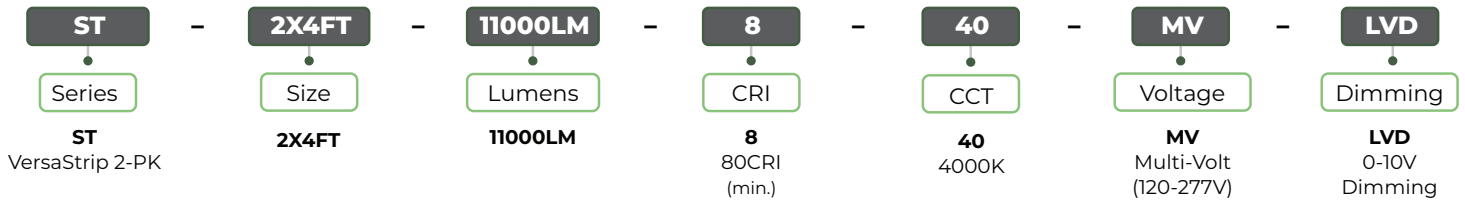



STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description (Dia)	Case QTY	CRI	CCT	Watts (Nom.)	Lumen Pkg	Delivered Lumens	Volt.	Dim	DLC
<input type="checkbox"/> ST-2X4FT-11000LM-8-40-MV-LVD	54598341	4' 2-Pack Strip Light	2	80+	4000K	97	11000	11526	120-277V	0-10V	Standard Search: 545983###




Note:
Specifications are based on the 2-Pack unit.

AVAILABLE STOCK ACCESSORIES (must be ordered separately, field installed)






Sensors (order separately, field installed)

Order Number	Description	Image
<input type="checkbox"/> 90600121	Multi-Volt Occupancy Sensor with Daylight Sensor	
<input type="checkbox"/> 90600647 (OS-ST-01)	Motion Sensor, Parallel, Twin Strip Configuration Only	


Included Mounting Brackets (More can be ordered separately, field installed)

Catalog Part Number	Order Number	Description	Image
<input type="checkbox"/> BR-ST-CLB	90600737	Continuous Linking Bracket (1 is Included with 2-Pack Luminaire)	
<input type="checkbox"/> BR-ST-PLB	90600738	Parallel Linking Bracket 2 Fixtures (2 are Included with 2-Pack Luminaire)	
<input type="checkbox"/> BR-ST-PC	90600739	Plastic Cover (2 are Included with 2-Pack Luminaire)	

Additional Mounting Brackets (must be ordered separately, field installed)

Catalog Part Number	Order Number	Description	Image
<input type="checkbox"/> BR-ST-AL-01	90600652	Adjustable Linking Bracket	
<input type="checkbox"/> BR-ST-LL-01	90600648	L Linking Bracket	
<input type="checkbox"/> BR-ST-TL-01	90600649	T Linking Bracket	
<input type="checkbox"/> BR-ST-PL-01	90600650	Parallel Linking Bracket 3 Fixtures	
<input type="checkbox"/> BR-ST-CL-01	90600651	Cross Linking Bracket	


DIMENSIONS / DETAILS

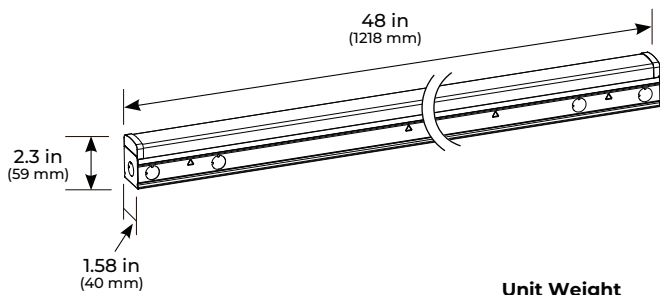


Unit Weight
3.65 lbs
(per luminaire)

MOUNTING

Surface Mount Kit




Suspension Mounting Kit

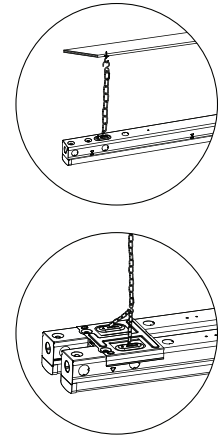

- Luminaire 2-Pack Includes:
- 1 Continuous Linking Bracket
 - 1 Mounting Bracket
 - 1 Wire Protection Ring
 - 4 Suspension Mount Chains, Hooks, Toggle Bolts
 - 2 Knock Out Covers
 - 2 Parallel Linking Brackets
 - 2 Plastic Covers + Screws

QUICK CONNECTORS ALLOW FOR EASY INSTALLATION

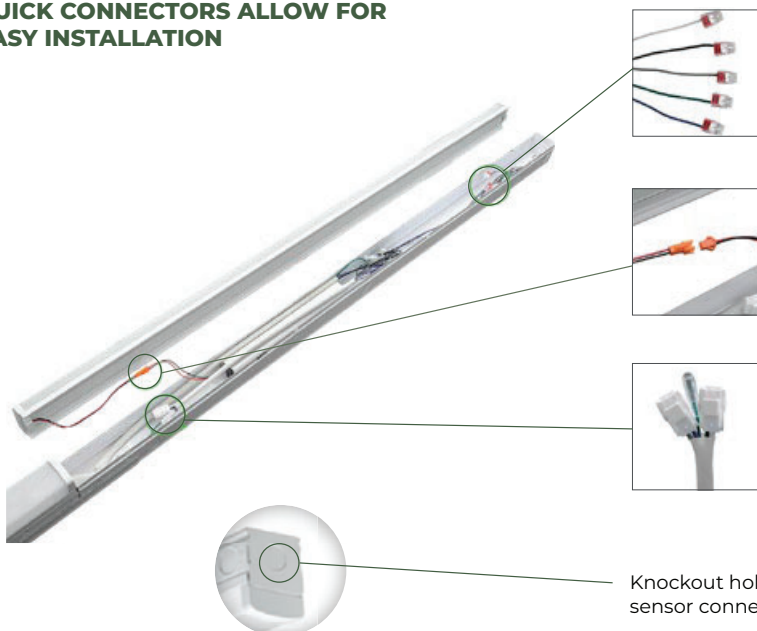


Multi-voltage wiring with quick connectors

Lamp detaches for easy installation

Link additional fixtures easily with installed wiring harness

Knockout hole for sensor connection

MULTIPLE CONFIGURATIONS

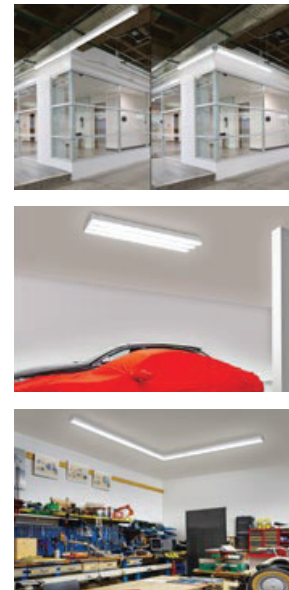

PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	90.79%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 60,000

Load Information

Power Factor	>0.90
THD	< 20%
Frequency	50/60 Hz
Sound Rating	< 20 Dba
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)

PHOTOMETRY



Luminaire Data: (Per 2-Pack Unit)

CCT & CRI	4000K, 80+ CRI
Initial Delivered Lumens	11525.4
Wattage	97W
Efficacy	118.8
Spacing	0° = 1.26 90° = 1.31

Note: Test Data based on single fixture.

Indoor Candela Plot

