

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## LFMT | LINEAR FLUSH MOUNT PUFFS

### 3 CCT COLOR PREFERENCE®

#### KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 3 Selectable CCTs (3000K, 4000K, 5000K)
- TRIAC Dimmable
- L70 > 160,000 Hours
- Damp Location Rated

#### SPECIFICATIONS

##### Construction

- Aluminum Housing with Frosted Acrylic Shade

##### Optics

- High impact, acrylic shade for zero pixelation and overall visual comfort
- Uniform, even light distribution

##### Installation

- Hard Wire – Installation Kit Included
- Field select CCT using integral switch behind the lens prior to installation. Ships at 3000K

##### Electrical

- > 160,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- TRIAC Dimming down to 10%
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located inside fixture.

##### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)



Easy access to color temperature switch on back of fixture




KEY DATA	
LUMEN RANGE	3666 – 6009
WATTAGE RANGE	40.1 – 67.1
EFFICACY RANGE (LPW)	84 – 98
REPORTED LIFE (HOURS)	L70 / > 160,000

#### Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



CATALOG LOGIC

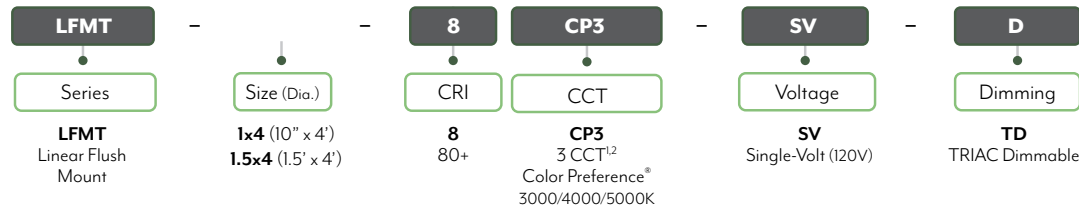


Notes:  
 1 Ships at lowest CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION


CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. <sup>1</sup>	DELIVERED LUMENS	LPW	VOLTAGE	DIMMABILITY
LFMT-1x4-8CP3-SV-TD	567121121	4' x 10" Rectangular Puff Flush Mount	1	80+	3000K	40	3200	3666	91	120V	TRIAC Dimmable
					4000K	40	3200	4035	98		
					5000K	40	3200	3690	92		
LFMT-1.5x4-8CP3-SV-TD	567131121	4' x 1.5' (18") Rectangular Puff Flush Mount	1	80+	3000K	65	5800	5921	88	120V	TRIAC Dimmable
					4000K	65	5800	6009	93		
					5000K	65	5800	5362	84		

Notes: 1. For more delivered lumens and test data see page 3, or visit ETISSL.com

DIMENSIONS / DETAILS

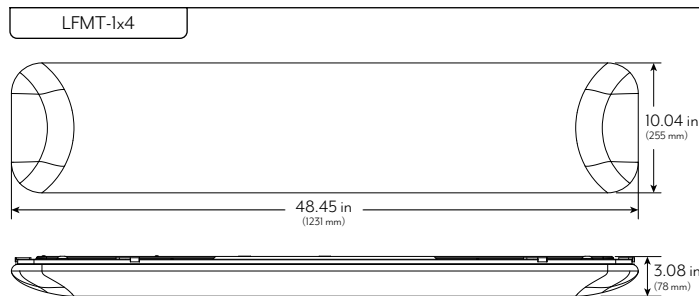


**Unit Weight**  
3.11 lbs.

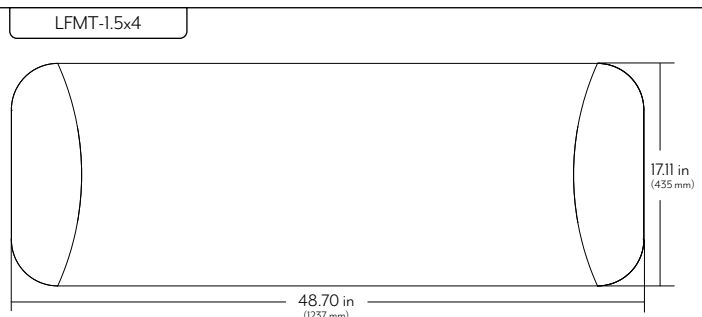


**Unit Weight**  
10.45 lbs.

MOUNTING / INSTALL



Hardware Kit included.

- Wire Connector
- Drywall Anchor
- Mounting Screw
- Electrical Box Screw
- Mounting Bracket
- Paper Template



CP3:  
Ships at 3000K

PHOTOMETRIC SAMPLE

<p style="text-align: center;">LFMT-1x4</p> <div style="display: flex; align-items: center;"> <p><b>Luminaire Data:</b> at 4000K</p> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td style="width: 30%;">CCT &amp; CRI</td> <td><b>4000K, 90+ CRI</b></td> </tr> <tr> <td>DELIVERED LUMENS</td> <td><b>4035</b></td> </tr> <tr> <td>WATTAGE</td> <td><b>41.1 W</b></td> </tr> <tr> <td>EFFICACY</td> <td><b>98</b></td> </tr> <tr> <td>BEAM ANGLE</td> <td><b>50%=127.3° 10%=172.8°</b></td> </tr> <tr> <td>SPACING</td> <td><b>0° = 1.35 90° = 1.30</b></td> </tr> </table> <p style="font-size: 8px; margin-top: 5px;">Photometric values based on tests performed in compliance with LM-63 &amp; LM-79</p>	CCT & CRI	<b>4000K, 90+ CRI</b>	DELIVERED LUMENS	<b>4035</b>	WATTAGE	<b>41.1 W</b>	EFFICACY	<b>98</b>	BEAM ANGLE	<b>50%=127.3° 10%=172.8°</b>	SPACING	<b>0° = 1.35 90° = 1.30</b>	<p style="text-align: center;">LFMT-1.5x4</p> <div style="display: flex; align-items: center;"> <p><b>Luminaire Data:</b> at 4000K</p> </div> <table border="1" style="width: 100%; border-collapse: collapse; margin-top: 5px;"> <tr> <td style="width: 30%;">CCT &amp; CRI</td> <td><b>4000K, 90+ CRI</b></td> </tr> <tr> <td>DELIVERED LUMENS</td> <td><b>6009</b></td> </tr> <tr> <td>WATTAGE</td> <td><b>64.4 W</b></td> </tr> <tr> <td>EFFICACY</td> <td><b>93</b></td> </tr> <tr> <td>BEAM ANGLE</td> <td><b>50%=127.1° 10%=170.5°</b></td> </tr> <tr> <td>SPACING</td> <td><b>0° = 1.35 90° = 1.30</b></td> </tr> </table> <p style="font-size: 8px; margin-top: 5px;">Photometric values based on tests performed in compliance with LM-63 &amp; LM-79</p>	CCT & CRI	<b>4000K, 90+ CRI</b>	DELIVERED LUMENS	<b>6009</b>	WATTAGE	<b>64.4 W</b>	EFFICACY	<b>93</b>	BEAM ANGLE	<b>50%=127.1° 10%=170.5°</b>	SPACING	<b>0° = 1.35 90° = 1.30</b>
CCT & CRI	<b>4000K, 90+ CRI</b>																								
DELIVERED LUMENS	<b>4035</b>																								
WATTAGE	<b>41.1 W</b>																								
EFFICACY	<b>98</b>																								
BEAM ANGLE	<b>50%=127.3° 10%=172.8°</b>																								
SPACING	<b>0° = 1.35 90° = 1.30</b>																								
CCT & CRI	<b>4000K, 90+ CRI</b>																								
DELIVERED LUMENS	<b>6009</b>																								
WATTAGE	<b>64.4 W</b>																								
EFFICACY	<b>93</b>																								
BEAM ANGLE	<b>50%=127.1° 10%=170.5°</b>																								
SPACING	<b>0° = 1.35 90° = 1.30</b>																								

**Candela Plot**

0° H    90° H

0° H    90° H

PERFORMANCE / Data

<p><b>Lumen Maintenance</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"><b>Ambient Temp.</b></td> <td><b>TM-21 Lumen Maintenance (54,000 hours)</b></td> </tr> <tr> <td>25° C (77° F)</td> <td>&gt; 89%</td> </tr> <tr> <td><b>Ambient Temp.</b></td> <td><b>TM-21 Theoretical L70 (hours)</b></td> </tr> <tr> <td>25° C (77° F)</td> <td>&gt; 160,000</td> </tr> </table>	<b>Ambient Temp.</b>	<b>TM-21 Lumen Maintenance (54,000 hours)</b>	25° C (77° F)	> 89%	<b>Ambient Temp.</b>	<b>TM-21 Theoretical L70 (hours)</b>	25° C (77° F)	> 160,000	<p><b>Load Information</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"><b>Power Factor</b></td> <td>&gt; 0.90</td> </tr> <tr> <td><b>THD</b></td> <td>&lt; 20%</td> </tr> <tr> <td><b>Frequency</b></td> <td>60 Hz</td> </tr> <tr> <td><b>Low Temp Start / Max Temp</b></td> <td>-20° C (-4° F) / 40° C (104° F)</td> </tr> </table>	<b>Power Factor</b>	> 0.90	<b>THD</b>	< 20%	<b>Frequency</b>	60 Hz	<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 40° C (104° F)
<b>Ambient Temp.</b>	<b>TM-21 Lumen Maintenance (54,000 hours)</b>																
25° C (77° F)	> 89%																
<b>Ambient Temp.</b>	<b>TM-21 Theoretical L70 (hours)</b>																
25° C (77° F)	> 160,000																
<b>Power Factor</b>	> 0.90																
<b>THD</b>	< 20%																
<b>Frequency</b>	60 Hz																
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 40° C (104° F)																

DIMMER COMPATIBILITY LIST

DIMMER BRAND	SERIES	DIMMER MODEL
<b>TRIAC DIMMERS</b>		
LUTRON	Maestro C-L	MACL-153M
LUTRON	Skylark C-L	SCL-153P
LUTRON	Diva C-L	DVCL-153P
LEGRAND	Radiant	RHCL453PTC
LEGRAND	Harmony	DCL453PTCCCV6
LEGRAND	Harmony	HCL453PTCCCV6
LUTRON	Skylark	CTCL-153PDH-WH
LUTRON	Toggler	TGCL-153PH-WH
LEVITON	Illumena Tech	R50-IPL06-10M
LUTRON	Diva C-L	DVWCL-153PH-WH
LUTRON	Diva	DVCL-153P
LUTRON	Maestro	PD-6WCL
LEGRAND	Radiant	RHCL453PTC