

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

SL | 7" SPIN LIGHT FLUSH MOUNT WITH PULL CHAIN | 3 CCT COLOR PREFERENCE®

KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 3 Selectable CCTs (3000K, 4000K, 5000K)
- This patented SpinLight® converts a bare lamp holder into a high-performing, energy-efficient, LED flush mount ceiling light
- Integrated Pull Chain (Includes 36-Inch string extension)
- SPEEDMOUNT® Kit included
- Damp Location Rated

SPECIFICATIONS

Construction

- PC Housing and Shade
- E26 Medium Base
- Integrated Pull Chain

Optics

- High impact, acrylic shade for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation

- Twists into most E26 medium based socket/lamp holder (integrated E26 base)
- Also includes a SPEEDMOUNT® Kit for remodel and new construction installations—converts a junction box into a lamp holder
- Field select CCT using integral switch behind the lens prior to installation. Ships at 3000K

Electrical

- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Non-Dimmable
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located inside fixture.

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etilighting.com/warranty/)



Twist-off lens gives easy access to color temperature select switch.

SpinLight®

3 Color Preference®



KEY DATA	
LUMEN RANGE	843 – 901
WATTAGE RANGE	10.17 – 10.25
EFFICACY RANGE (LPW)	83 – 90
REPORTED LIFE (HOURS)	L70 / > 160,000


Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



SL | 7" SPIN LIGHT FLUSH MOUNT WITH PULL CHAIN | 3 CCT COLOR PREFERENCE®

CATALOG LOGIC

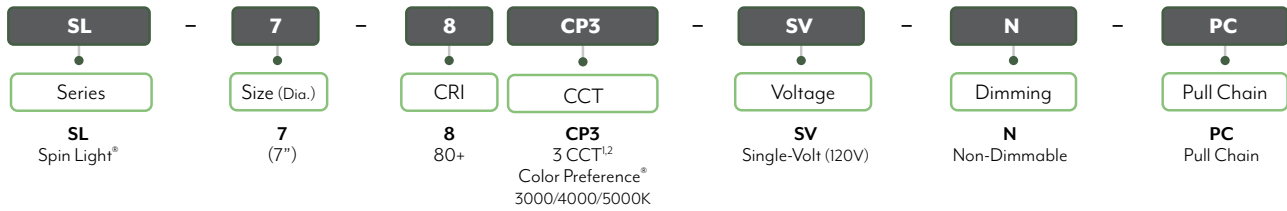

Notes:


1. Ships at lowest CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. ¹	DELIVERED LUMENS	LPW	VOLTAGE	DIMMABILITY
SL-7-8CP3-SV-N-PC	C02003402A	7" Spin Light® Flush Mount with pull chain	5	80+	3000K	10.5	830	871	85	120V	Non-Dimmable
					4000K	10.5	830	901	90		
					5000K	10.5	830	843	83		

Notes: 1. For more delivered lumens and test data see below, or visit ETISSL.com

DIMENSIONS / DETAILS

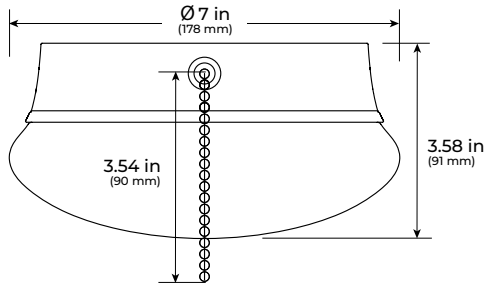

Unit Weight
0.8 lbs.



CP3:
Ships at 3000K

MOUNTING (Included)



QUICK AND EASY INSTALLATION



Easily twists into existing lamp holder, just like a light bulb

- Included:
- SpeedMount™ Socket
 - Mounting Plate Screws
 - Wire Connectors
 - 36 in. String Extension



PHOTOMETRIC SAMPLE




Luminaire Data: at 4000K

CCT & CRI	4000K, 90+ CRI
DELIVERED LUMENS	901
WATTAGE	10.2 W
EFFICACY	90
BEAM ANGLE	50% = 123.8° 10% = 86.5°
SPACING	0° = 1.35 90° = 1.30

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot



PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 89%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 160,000

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 40° C (104° F)



ETI Lighting
720 Northgate Parkway, Wheeling, IL 60090 | TEL: 1.855.384.7754
E-mail: ETIorders@ETISSL.com | ETISSL.com

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.

SL_PC_C02003402A_Spec | Page 2 of 2 | August 16, 2024