

## PVLFM | PIVOT LINEAR FLUSH MOUNTS

### 3 CCT COLOR PREFERENCE®

#### KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 3 Selectable CCTs Standard (3000K, 4000K, 5000K)
- 80+ CRI
- TRIAC Dimming Down to 10% (120V)

#### SPECIFICATIONS

##### Construction

- Cold Rolled Steel Back Plate
- PVC Trim with White Finish

##### Optics

- Polymer diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution
- Backlit technology

##### Installation

- Field select CCT using integral switch located on fixture end prior to installation. Ships at 3000K
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.

##### Electrical


- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- TRIAC dimming, down to 10%\* (120V)
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located inside fixture.

\* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

##### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

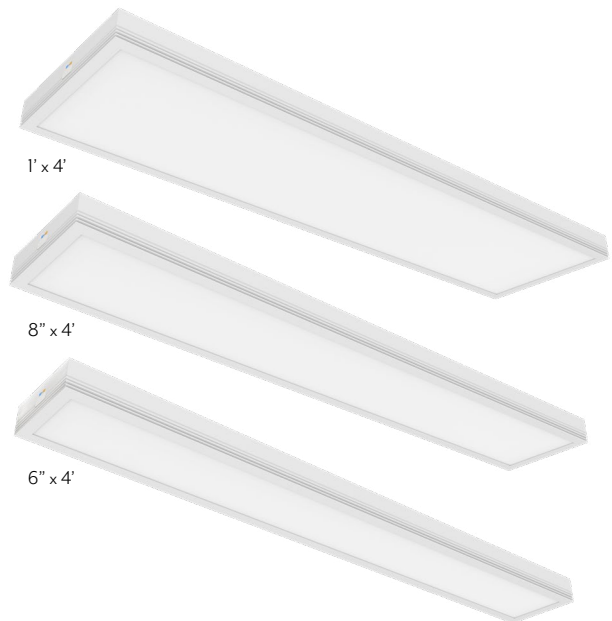


KEY DATA	
LUMEN RANGE	2646 – 4501
WATTAGE RANGE	39.0 – 53.1
EFFICACY RANGE (LPW)	68 – 85
REPORTED LIFE (HOURS)	L70 / > 50,000

#### Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



CATALOG LOGIC

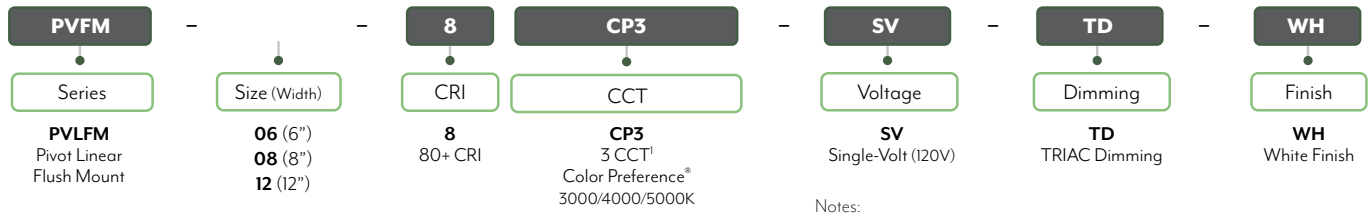

Notes:

1. Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG.	DELIVERED LUMENS	LPW	VOLTAGE	DIM
PVLFM-06-8CP3-SV-TD-WH	C05021401A	Pivot Linear Flush Mount 6" x 4'	2	80+	3000K	40	2800	2771	68	120V	TRIAC
					4000K	40	2800	3058	72		
					5000K	40	2800	2646	68		
PVLFM-08-8CP3-SV-TD-WH	C05022401A	Pivot Linear Flush Mount 8" x 4'	2	80+	3000K	50	4000	3643	74	120V	TRIAC
					4000K	50	4000	3927	78		
					5000K	50	4000	3519	73		
PVLFM-12-8CP3-SV-TD-WH	C05023401A	Pivot Linear Flush Mount 1' x 4'	2	80+	3000K	55	4500	4172	80	120V	TRIAC
					4000K	55	4500	4501	85		
					5000K	55	4500	3981	79		

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS



Description	Dimensions/Weights			
	L	W	H	weight (lbs)
6" x 46"	46" (1167mm)	6.2" (158mm)	2.0" (52mm)	5.2
8" x 46"	46" (1167mm)	8.0" (204mm)	2.0" (52mm)	6.1
12" x 46"	46" (1167mm)	12.0" (306mm)	2.0" (52mm)	7.5




Easy access to color temperature on fixture end



Ships at 3000K

MOUNTING

Includes Quick Fit Installation Kit:  
Simply mount the bracket to the ceiling and slide the fixture into place.

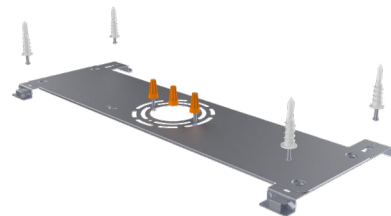

PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 50,000

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 104°F (-20°C to 40°C)

DIMMER COMPATIBILITY LIST

DIMMER BRAND	DIMMER MODEL
<b>TRIAC DIMMERS</b>	
Lutron	LECL-153
Lutron	SCL-153P
Lutron	NTCL-250
Lutron	GT-150
Leviton	DSL06-ILZ
Leviton	REL06
Leviton	TSL06
Leviton	RDL06
Cooper	9540
Cooper	9573
Cooper	DLC03P
Cooper	SUT7
Cooper	TAL06P2

PHOTOMETRIC SAMPLES

GIN

**Luminaire Data:**

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>3058</b>
WATTAGE	<b>42.4W</b>
EFFICACY	<b>72</b>
SPACING	<b>0° = 1.33 90° = 1.26</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

Legend: 0° H (dark green), 90° H (light green)

BIN

**Luminaire Data:**

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>3927</b>
WATTAGE	<b>50.5W</b>
EFFICACY	<b>78</b>
SPACING	<b>0° = 1.37 90° = 1.26</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

Legend: 0° H (dark green), 90° H (light green)

12IN

**Luminaire Data:**

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>4501</b>
WATTAGE	<b>35.1W</b>
EFFICACY	<b>85</b>
SPACING	<b>0° = 1.22 90° = 1.26</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

Legend: 0° H (dark green), 90° H (light green)