

## VTLFM | VERMONT LINEAR FLUSH MOUNTS

### 3 CCT COLOR PREFERENCE®

#### KEY FEATURES

- Luminaire uses ETI's patented Color Preference® with 3 Selectable CCTs Standard (3000K, 4000K, 5000K)
- 80+ CRI
- TRIAC Dimming Down to 10% (120V)

#### SPECIFICATIONS

##### Construction

- Cold Rolled Steel Back Plate
- PVC White Finish with Walnut Trim or Black Finish with Oak Trim options

##### Optics

- Polymer diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution
- Backlit technology

##### Installation

- Field select CCT using integral switch located on fixture end prior to installation. Ships at 3000K
- Includes Quick Fit Installation Kit. Simply mount the bracket to the ceiling and slide the fixture into place.

##### Electrical

- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- TRIAC dimming, down to 10%\* (120V)
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)
- ETI's patented selectable CCT COLOR PREFERENCE® allows for easy field-adjustable color temperature selection with switch located on fixture end.

\* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

##### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



White Finish  
with Walnut Trim





Black Finish  
with Oak Trim




KEY DATA	
LUMEN RANGE	4075 – 4796
WATTAGE RANGE	50.3 – 56.0
EFFICACY RANGE (LPW)	81 – 86
REPORTED LIFE (HOURS)	L70 / > 50,000

#### Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)



CATALOG LOGIC

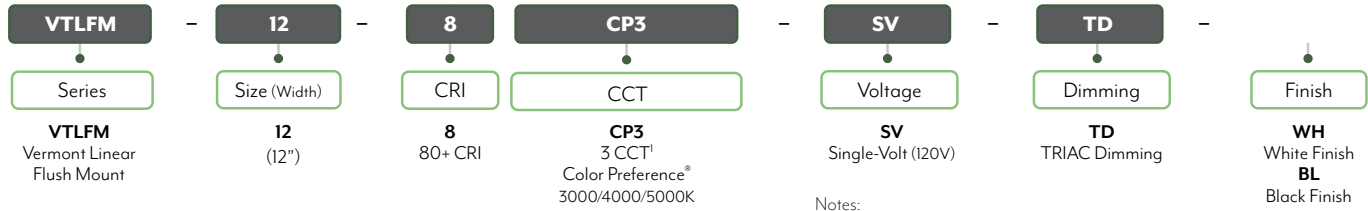

Notes:


1. Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG.	DELIVERED LUMENS	LPW	VOLTAGE	DIM
VTLFM-12-8CP3-SV-TD-WH	C05006402A	Vermont Linear Flush Mount 1' x 4', White with Walnut Finish	2	80+	3000K	55	4500	4472	81	120V	TRIAC
					4000K	55	4500	4796	86		
					5000K	55	4500	4240	81		
VTLFM-12-8CP3-SV-TD-BL	C05006401A	Vermont Linear Flush Mount 1' x 4', Black with Oak Finish	2	80+	3000K	55	4500	4361	82	120V	TRIAC
					4000K	55	4500	4653	86		
					5000K	55	4500	4075	81		

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com

DIMENSIONS / DETAILS

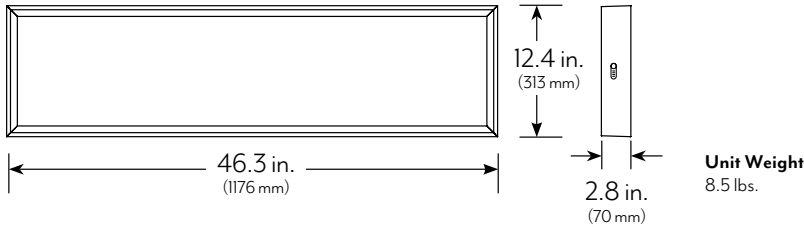


Easy access to color temperature on fixture end



Ships at 3000K

MOUNTING

Includes Quick Fit Installation Kit: Simply mount the bracket to the ceiling and slide the fixture into place.

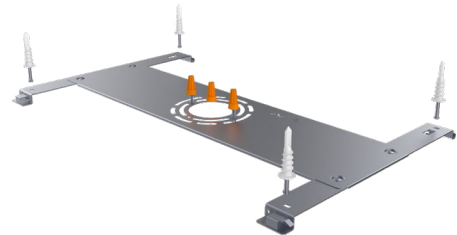

**PERFORMANCE / Data**

**Lumen Maintenance**

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 50,000

**Load Information**

<b>Power Factor</b>	> 0.90
<b>THD</b>	< 20%
<b>Frequency</b>	60 Hz
<b>Low Temp Start / Max Temp</b>	-4°F to 104°F (-20°C to 40°C)

**DIMMER COMPATIBILITY LIST**

DIMMER BRAND	DIMMER MODEL
<b>TRIAC DIMMERS</b>	
LUTRON	LECL-153
LUTRON	SCL-153P
LUTRON	NTCL-250
LUTRON	GT-150
LEVITON	DSL06-ILZ
LEVITON	REL06
LEVITON	TSL06
LEVITON	RDL06
COOPER	9540
COOPER	9573
COOPER	DLC03P
COOPER	SUT7
COOPER	TAL06P2

\* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

**PHOTOMETRIC SAMPLES**

White

**Luminaire Data:**

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>4796</b>
WATTAGE	<b>56.0W</b>
EFFICACY	<b>86</b>
SPACING	<b>0° = 1.33 90° = 1.27</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

■ 0° H ■ 90° H

Black

**Luminaire Data:**

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>4653</b>
WATTAGE	<b>54.1W</b>
EFFICACY	<b>86</b>
SPACING	<b>0° = 1.34 90° = 1.27</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

■ 0° H ■ 90° H