

**VRST | VERSASTRIP SERIES**  
4000K | 5000K

**KEY FEATURES**

ETI's VersaStrip Series are commercial LED strip lights with 0-10V dimming. These powerful, energy-efficient 4' strip lights come in 1-pack and 2-pack.

**CCT & Light Quality**

- Available in 4000K and 5000K options, 80+ CRI

**Light Output & Efficacy**

- High Lumen Output: 5800 lm per 4' fixture, up to 132 LPW  
11700 lm for two 4' fixtures, up to 127 LPW

**Dimming, Controls**

- 0-10V Dimming

**Continuous Runs**

- Continuous Runs: 4-FT up to 8 | 8-FT up to 4

**SPECIFICATIONS**

**Construction & Optics**

- Cold rolled steel housing, white powder coated
- Frosted, 1mm thick polymer lens provides a uniform and soft visual appearance when in direct view with minimal LED pixelation and reduces glare

**Installation**

- Surface Mount hardware included
- Continuous Runs: 4-FT up to 8 | 8-FT up to 4

**Electrical**

- >140,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60 Hz
- 0-10V dimmable driver
- Operating temperature: -4°F to 113°F (-20°C to 45°C)

**Warranty**

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.ETISSL.com/warranty/)

KEY DATA	
LUMEN RANGE	5934 – 11796
WATTAGE RANGE	45 – 96
EFFICACY (LPW)	127 – 132
REPORTED LIFE (HOURS)	L70 / >140,000

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



**VersaStrip**




**Certifications & Test Data**

- cUS ETL Rated, Damp location
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



CATALOG LOGIC

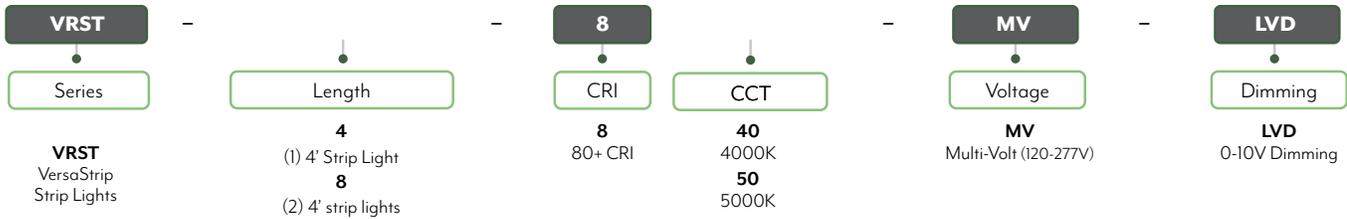


ORDER INFORMATION / SPEC DETAILS

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	VOLTAGE	DIMMING	DLC	CRI	CCT	NOMINAL WATTS	LUMEN PACKAGE	DELIVERED LUMENS	EFFICACY
VRST-4-840-MV-LVD	B01078601A	4' VersaStrip 4000K	120-277V	0-10V	Standard	80+	4000K	45	5800	5951	132
VRST-4-850-MV-LVD	B01078801A	4' VersaStrip 5000K	120-277V	0-10V	Standard	80+	5000K	45	5800	5934	130
VRST-8-840-MV-LVD	54598341	(2) 4' VersaStrip 4000K	120-277V	0-10V	Standard	80+	4000K	97	11700	11526	119
VRST-8-850-MV-LVD	B01079801A	(2) 4' VersaStrip 5000K	120-277V	0-10V	Standard	80+	5000K	92	11700	11796	127

Notes: 1. For more delivered lumens and test data see pages 3, or visit ETISSL.com. 2. For DLC listing, search part number. Example: VRST-4-840-MV-LVD. DLC look up information for VRST-8-840-MV-LVD is under "54598341".

DIMENSIONS / DETAILS

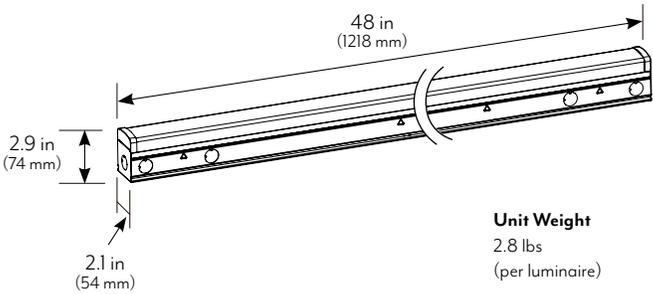

PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	87.77%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	>140,000


Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)

MOUNTING

**All Models**  
Include Surface Mount Hardware.

**8-FT Models**  
(2-PK 4-FT Fixtures)  
also Include Bracket

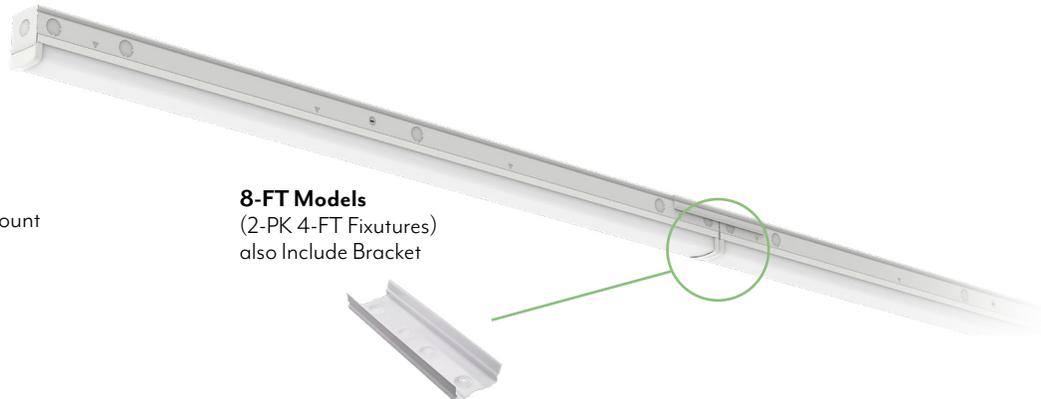

**DIMMING LIST**

DIMMER BRAND	DIMMER MODEL
<b>0-10V DIMMERS</b>	
LUTRON	DVTV-IV/WH
LUTRON	DVSTV-WH
LUTRON	NFTV-WH
LUTRON	NTSTV-DV-WH
LEVITON	IP710-DLZ
COOPER	SFIOP-W
LEVITON	DD710-BDZ

**PHOTOMETRIC SAMPLES**

4-Foot




**Luminaire Data:**

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>5951</b>
WATTAGE	<b>45</b>
EFFICACY	<b>132</b>
SPACING	<b>0° = 1.26 / 90° = 1.371</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

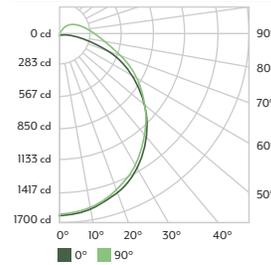

8-Foot



**Luminaire Data:**

CCT & CRI	<b>5000K, 80+ CRI</b>
DELIVERED LUMENS	<b>11796</b>
WATTAGE	<b>93</b>
EFFICACY	<b>127</b>
SPACING	<b>0° = 1.26 / 90° = 1.28</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

**Candela Plot**

