

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

EM | Emergency Light, 2 Head


90+ MINUTE EMERGENCY OPERATION
Black or White Finish Available

KEY FEATURES

ETi SSL's high impact UL 94V-0 flame rated thermoplastic housing LED Emergency Light fixtures are a great value option for part of standard indoor egress systems.

- Two Fully Adjustable 1.1 Watt LED Lamp Heads
- High impact UL 94V-0 flame rated thermoplastic housing
- Universal voltage—120/277V
- Rated Operating temperatures from 0° to 40° C (32° - 104° F)
- Built in 3.6V 1000mAh Ni-MH battery for minimum 90 min.
- Emergency operation (max 24 hr full recharge time)
- Test switch and charge indicator.
- Reported L70 >50,000
- 5-year limited warranty

Black Finish

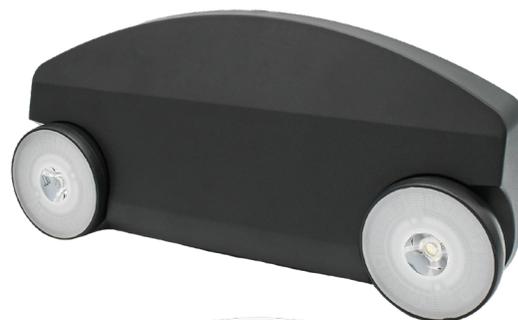

White Finish



SPECIFICATIONS

Illumination

- Long-life, high-intensity LEDs—139 lumens per head
- Lamps: 2 ultra-bright 6500K LED lamp heads

Optics

- Factory-installed, adjustable thermoplastic lamp heads

Construction

- Injection-molded thermoplastic ABS housing, UL 94V-0 flame rating
- White or Black finish available

Electrical

- Universal voltage—120/277V, 50/60Hz.

Battery Backup

- Ni-MH battery
- Battery operating time: >90 minutes
- Max 24-hour recharge time
- Sign features a test button and AC indicator light

Installation and Mounting

- Mounting: wall mounting with knock outs in Back Plate
- Universal J-box Mounting Pattern

Environment

- Damp location rated
- Temperature rating: 32°F to 104°F (0°C to 40°C)

KEY DATA	
Wattage	1.1
Battery Type	3.6V Ni-MH
Max Recharge Time	24 hours
Reported Life (Hours)	L70 / >50,000

Compliance

- cULus Listed, UL94V-0, Damp Location
- UL 924 Standard for Emergency Lighting and Power Equipment, CSA C.22.2 No. 141 Standard for Unit Equipment for Emergency Lighting
- Driver rated for FCC part 15 Class B for use in residential or commercial applications




STOCK ORDERING INFORMATION


Catalog Part #	Order #	Description	CCT	LED Watts ²	lm ¹	Input Voltage	Case QTY	BBU
EM-EL-B-1W	65503102	2-Head EM Light, Black Finish	6500K	2	278	120/277V	12	Ni-MH
EM-EL-W-1W	65504102	2-Head EM Light, White Finish	6500K	2	278	120/277V	12	Ni-MH

Notes: 1. For more delivered lumens, visit ETISSL.com or IES link (right), lumens based on 2 lamp heads
 2. Wattage based on 2 lamp heads when LEDs are on.

PHOTOMETRIC




DIMENSIONS




Unit Weight 0.55 lb.

SPACING GUIDELINES

Notes:
 Also meets the additional illumination requirements of NFPA 101: 1 fc minimum and max/min ratio of 40:1.

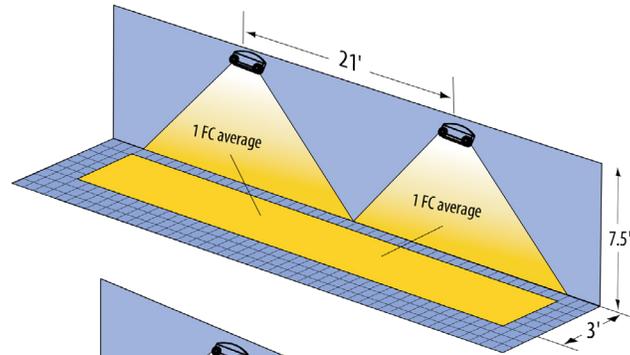

Example of multiple luminaires illuminating a 3' path of egress.

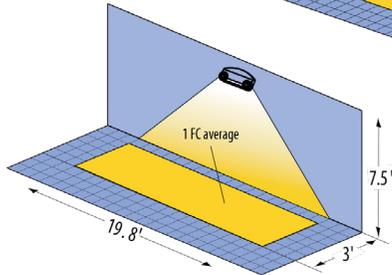

Example of single luminaire illuminating a 3' path of egress.