

## SCWR | SELECTABLE COMMERCIAL WRAP SERIES

3 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

### KEY FEATURES

ETI's Selectable Commercial Wrap Series offers a convenient, flexible lighting solution that saves energy and costs without sacrificing quality. These lights have a low profile, are durable, and have a micro prismatic lens for low glare and comfortability.

### CCT & Light Quality

- Luminaire uses ETI's patented Color Preference® with 3 Selectable CCTs Standard (3500K, 4000K, 5000K)

### Light Output & Efficacy

- 3 Lumen Boost and Wattage Levels:

**2'x6"**: 1700 | 2425 | 3150 lm    **4'x6"**: 3300 | 4800 | 6300 lm    **4'x10"**: 4200 | 6150 | 8100 lm  
 12 | 18 | 23W                      23 | 34 | 45W                      29 | 43 | 57W

### Dimming, Controls

- 0-10V Dimming

### SPECIFICATIONS

#### Construction

- Polycarbonate housing, white finish
- Low profile design with quick removable end caps

#### Optics

- Frosted, fine-ribbed lens with minimized glare (UGR 21)

#### Installation

- Surface and drywall mounting kits included
- Field select one of three CCTs at installation with an integral switch accessible under end cap. Ships at 4000K
- Field select one of three Lumen Settings at installation with an integral switch accessible under end cap. Ships set to Highest

#### Electrical / Options

- >150,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60 Hz
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)
- 0-10V dimmable driver
- ETI's patented 3 CCT COLOR PREFERENCE® and 3 LUMEN BOOST® allows for easy field-adjustable color temperature and lumen selection with switch located under the easy-to-remove lens.

#### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](http://ETISSL.com/warranty/)

KEY DATA	
LUMEN RANGE	1730 - 8134
WATTAGE RANGE	12 - 56
EFFICACY RANGE (LPW)	136 - 154
REPORTED LIFE (HOURS)	L70 / >150,000

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	




#### Certifications & Test Data

- cUS ETL Rated, Damp location
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- DLC® (DesignLights Consortium) Listed. Please refer to DLC for specific product qualifications at [www.designlights.org](http://www.designlights.org) (Search by part number, example: SCWR-4-N-LB3-8CP3-MV-LVD)



CATALOG LOGIC

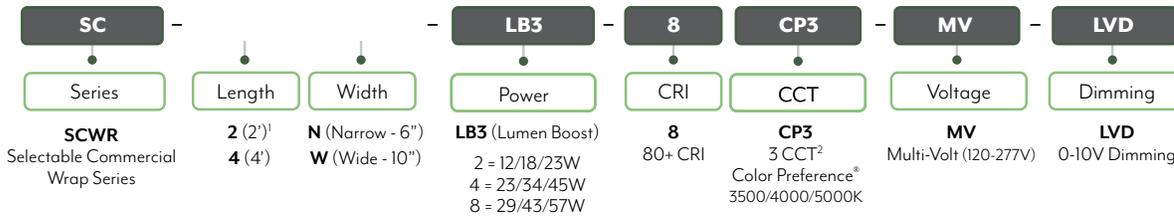

Notes:  
 1. 2' is available in N (Narrow - 6" width only).  
 2. Ships at lowest CCT. Installing contractor responsible for ensuring desired CCT selected during installation.


ORDER INFORMATION / SPEC DETAILS

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	VOLTAGE	DIMMING	CRI	DLC	CCT	NOMINAL WATTS	DELIVERED LUMENS	EFFICACY	
2' x 6"	SCWR-2-N-LB3-8CP3-MV-LVD	2' x 6" Selectable Commercial Wrap	120-277V	0-10V	80+	Standard	3500K	12	1730	145	
								17	2366	143	
								22	3075	139	
							4000K	12	1754	149	
								17	2412	148	
								22	3158	145	
								5000K	12	1743	146
									17	2373	144
									22	3085	140
4' x 6"	SCWR-4-N-LB3-8CP3-MV-LVD	4' x 6" Selectable Commercial Wrap	120-277V	0-10V	80+	Standard	3500K	23	3391	145	
								34	4768	141	
								45	6168	136	
							4000K	23	3433	149	
								34	4882	146	
								45	6327	141	
								5000K	23	3413	147
									34	4812	143
									45	6158	137
4' x 10"	SCWR-4-W-LB3-8CP3-MV-LVD	4' x 10" Selectable Commercial Wrap	120-277V	0-10V	80+	Standard	3500K	28	4240	149	
								38	5686	147	
								55	7931	141	
							4000K	28	4287	154	
								38	5801	153	
								55	8134	148	
								5000K	28	4249	152
									38	5731	148
									55	7923	142

SENSOR ACCESSORY (sold separately)

CATALOG NUMBER	ORDER NUMBER	DESCRIPTION	DETAILS
SCWR-SDMS	W010000322	Step Dimming Motion Sensor	 <a href="#">PRODUCT LISTING</a> (located on ETISSL.com)

**DIMENSIONS / DETAILS**

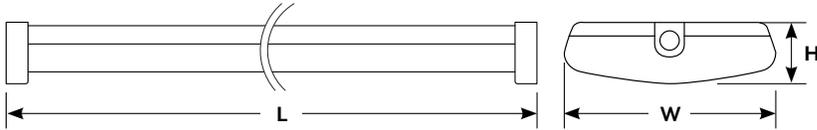

Size	L	W	H	weight
2' x 6"	24.0" (609mm)	6.0" (153mm)	3.0" (76mm)	2.6 lbs.
4' x 6"	46.0" (1167mm)	6.0" (153mm)	3.0" (76mm)	4.8 lbs.
4' x 10"	46.0" (1167mm)	10.0" (254mm)	3.0" (76mm)	6.5 lbs.



Easy access to CCT & Wattage Select switch underneath lens



Ships at highest lumen setting, and 4000K

**PERFORMANCE / Data**

**Lumen Maintenance**

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	89.16%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 150,000

**Load Information**

<b>Power Factor</b>	> 0.90
<b>THD</b>	< 20%
<b>Frequency</b>	60 Hz
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 45° C (113° F)

**DIMMER COMPATIBILITY LIST**


DIMMER BRAND	DIMMER MODEL
<b>0-10V DIMMERS</b>	
LUTRON	DVT-IV-WH
LUTRON	DVSTV-WH
LUTRON	NFTV-WH
LUTRON	NTSTV-DV-WH
LEVITON	IP710-DLZ
COOPER	SF10P-W
LEVITON	DD710-BDZ

**PHOTOMETRIC SAMPLES**

**2' x 6"**

**Luminaire Data:** at 4000K  
SCWR-2-N-LB3-8CP3-MV-LVD

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>3158   2412   1754</b>
WATTAGE	<b>21.8   16.3   11.8</b>
EFFICACY	<b>145   148   149</b>
SPACING	<b>0° = 1.28 / 90° = 1.32</b>

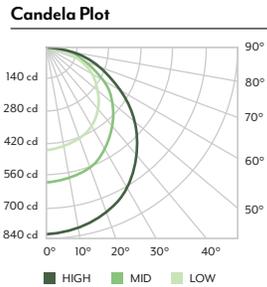


Photometric values based on tests performed in compliance with LM-63 & LM-79

**4' x 6"**

**Luminaire Data:** at 4000K  
SCWR-4-N-LB3-8CP3-MV-LVD

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>6327   4882   3433</b>
WATTAGE	<b>44.9   33.5   23.1</b>
EFFICACY	<b>141   146   149</b>
SPACING	<b>0° = 1.32 / 90° = 1.32</b>

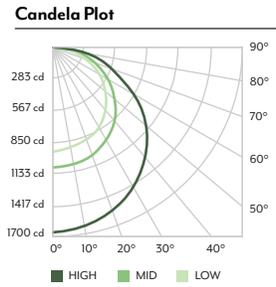


Photometric values based on tests performed in compliance with LM-63 & LM-79

**4' x 10"**

**Luminaire Data:** at 4000K  
SCWR-4-W-LB3-8CP3-MV-LVD

CCT & CRI	<b>4000K, 80+ CRI</b>
DELIVERED LUMENS	<b>8134   5801   4287</b>
WATTAGE	<b>54.9   38.0   27.8</b>
EFFICACY	<b>148   153   154</b>
SPACING	<b>0° = 1.33 / 90° = 1.29</b>

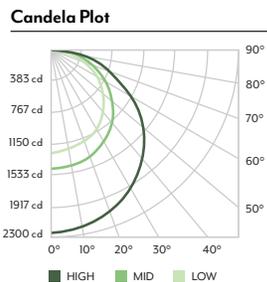

Photometric values based on tests performed in compliance with LM-63 & LM-79