




PRODUCT OVERVIEW

ETI's Boost Center Basket Troffer Series has a **slim design for shallow plenums** and includes **4 Selectable Wattages and 3 Selectable CCTs, for convenience and flexibility!** Equipped with 0-10V dimming, universal 120-277 voltage, and various mounting options, they are ideal for office lighting, schools, common areas, and back-of-house for multifamily, hospitality, retail, and other commercial applications.



INNOVATE. ILLUMINATE. INSPIRE.

BOOST CENTER BASKET TROFFERS | 4 LUMEN BOOST® | 3 CCT COLOR PREFERENCE®

PERFORMANCE SUMMARY					
Size	Lumen Pkg Range (LB4)	Selectable Watt. Levels	CCT (CP3)	DLC	Dist. Plot
2X4	3360 – 5850	24 29 32 39	3500K 4000K 5000K	Premium	
2X2	2100 – 4350	15 19 24 29	3500K 4000K 5000K	Standard	
1X4	2100 – 4350	15 19 24 29	3500K 4000K 5000K	Standard	

Great for Shallow Plenums
Depth as low as 1.8" (1x4) / 2.25" (2x4, 2x2)

* Lumen package ranges are approximate values. For actual delivered lumen data, please refer to spec sheet.

ELECTRICAL DATA

Operation: 120-277V 50/60Hz
 Low Temp Start / Max Temp: -20°C (-4°F) / 40°C (104°F)
 Controls: 0-10V, OC Sensor and BBU Options
 Surge Protection: L-N:1KV, LN-G:2KV

CERTIFICATIONS & OTHER INFO

Warranty: 5 year
 IC Rated for direct contact with insulation
 UL/cUL Listed: Damp




Integrated housing guide
clips to install into recessed grid




Easy access to field-selectable wattages and CCTs on back of luminaires

MOUNTING ACCESSORIES


Drywall Mount Kit (order separately)



Suspension Mount (order separately)



Surface Mount (order separately)

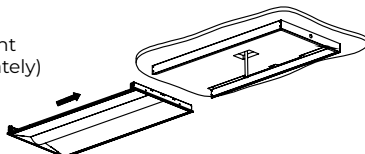

EMERGENCY

Troffers with Integral Battery Backup in stock and ready to ship.



ETI Lighting
4873 Thurmon Tanner Parkway,
Flowerly Branch, GA 30542

1.855.384.7754 | www.etissl.com
Quotes: quotes@etissl.com
Orders: etiors@etissl.com

All specifications are subject to change without notice. All reported values are typical values, measured under laboratory conditions @ 25° C (77° F). Actual performance can vary slightly as a result of end-user application & environment.