





**PRODUCT OVERVIEW**

ETI SSL's back-lit Multi-Select Flat Panel Series has a **slim design for shallow plenums** and includes **3 Selectable Wattages and 3 Selectable CCTs, for convenience and flexibility!** Equipped with 0-10V dimming, universal 120-277 voltage, and various mounting options, they are ideal for office lighting, schools, common areas, and back-of-house employee areas for hospitality, multifamily, retail, and other commercial applications.

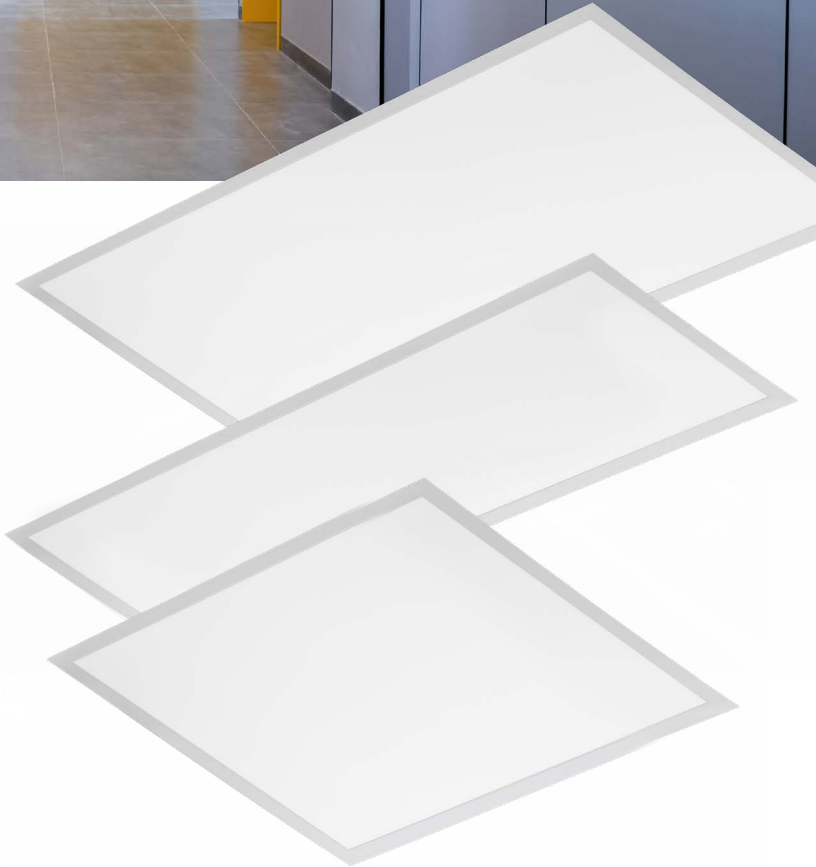

INNOVATE. ILLUMINATE. INSPIRE.

PERFORMANCE SUMMARY					
Size	Lumen Pkg Range (LB3)	Selectable Watt. Levels	CCT (CP3)	DLC	Dist. Plot
2X4	3300 – 5500	30   40   50	3500K 4000K 5000K	Standard	
2X2	2200 – 4400	20   30   40	3500K 4000K 5000K	Standard	
1X4	2200 – 4400	20   30   40	3500K 4000K 5000K	Standard	

Great for Shallow Plenums  
1.69" Depth


\* Lumen package ranges are approximate values.  
For actual delivered lumen data, please refer to spec sheet.

**ELECTRICAL DATA**



Operation: 120-277V 50/60Hz  
 Low Temp Start / Max Temp: -4°F to 104°F (-20°C to 40°C)  
 Controls: 0-10V, BBU Options  
 Surge Protection: 2.5kV

**CERTIFICATIONS & OTHER INFO**

Warranty: 5 year  
 IC Rated for direct contact with insulation  
 cUS ETL Rated: Damp, IP20

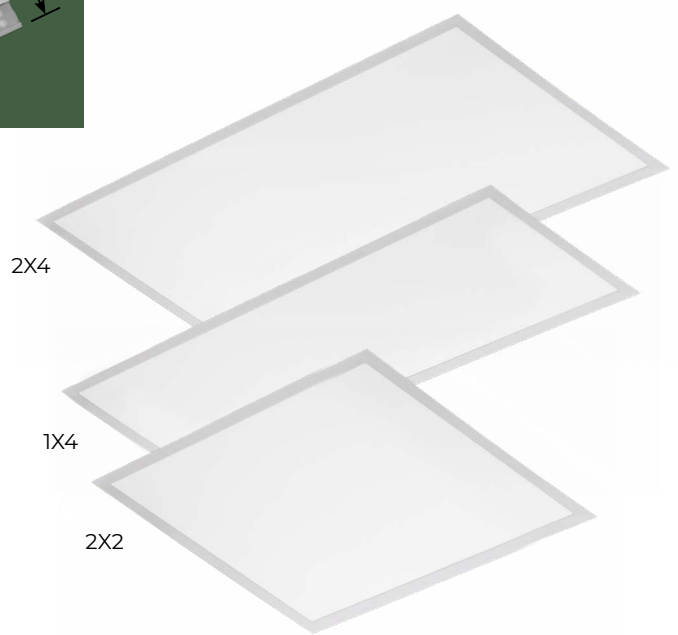


Integrated mounting clips included to install into recessed grid

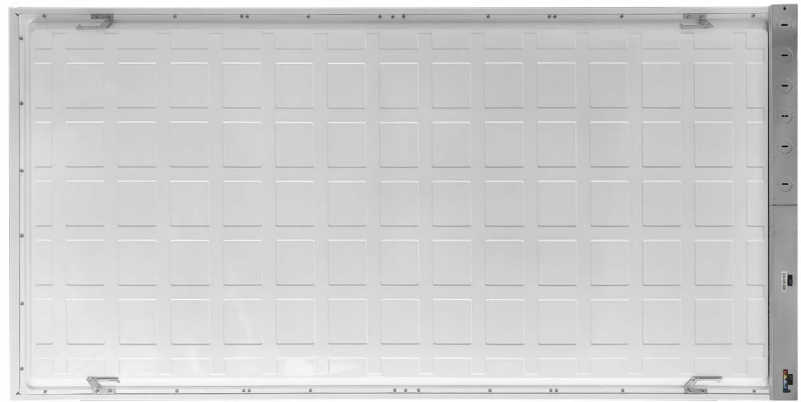


Easy access to field-selectable wattages and CCTs on back of luminaires

**MOUNTING ACCESSORIES**

Suspension Mount (order separately)



Surface Mount (order separately)



**EMERGENCY**

Flat Panels with Integral Battery Backup in stock and ready to ship.



ETI Lighting  
 4873 Thurmon Tanner Parkway,  
 Flowery Branch, GA 30542

1.855.384.7754 | www.etissl.com  
 Quotes: quotes@etissl.com  
 Orders: etiorsers@etissl.com

All specifications are subject to change without notice.  
 All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).  
 Actual performance can vary slightly as a result of end-user application & environment.