

## 24" LED ROUND FLUSH MOUNT

REVA STEPPED LENS | 4000K

### KEY FEATURES

- Durable and versatile fixture with reva stepped lens
- 50,000-hour life
- TRIAC Dimming

### SPECIFICATIONS

#### Construction

- Durable, shatter-proof acrylic
- Reva stepped lens

#### Light Quality

- 4000K, 80+ CRI

#### Optics

- PC diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

#### Installation

- Hardwire install
- Mount with included electrical box screws

#### Electrical

- 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -4°F – Max 95°F
- Triac dimming, down to 10%\*

\* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

#### Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



KEY DATA	
Lumen Range	3566
Wattage Range	39.2
Efficacy Range (LPW)	91
Reported Life (Hours)	L70 / >50,000


#### Certifications & Test Data

- All luminaires are built to UL 1598 standards and have the appropriate UL labels and information on product
- Damp location rated
- IC Rated for direct contact with insulation
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- RoHS Compliant



# 24" LED Round Flush Mount 3 REVA STEPPED LENS | 4000K

## CATALOG LOGIC

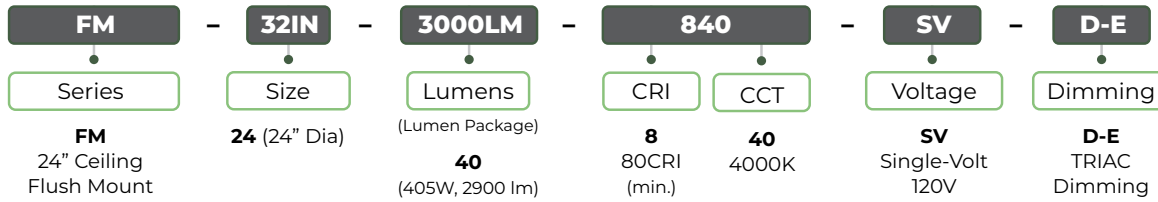


## STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Description	Case QTY	Lumen Package	Delivered Lumens <sup>1</sup>	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dim
FM-24-40-840-SV-D-E	54614242	Round Flush Mount	2	2900	3566	40	91	4000K	80+	120V	TRIAC

Notes: 1. For more delivered lumens and test data on below, or visit ETISSL.com

## DIMENSIONS / DETAILS

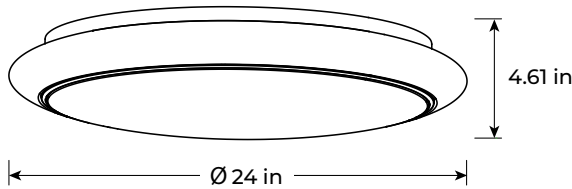

**Unit Weight**  
4.30 lbs

## PERFORMANCE / DATA

### Lumen Maintenance

Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	50,000

### Load Information

<b>Power Factor</b>	.90
<b>THD</b>	< 20%
<b>Low Temp Start / Max Temp</b>	-20° C (-4° F) / 45° C (113° F)


## PHOTOMETRIC SAMPLE

Luminaire Data: at 3000K

CCT & CRI	<b>3000K, 80+ CRI</b>
Delivered Lumens	<b>3566</b>
Wattage	<b>39.2W</b>
Efficacy	<b>91</b>
Beam Angle	<b>50%=117.5°</b> <b>10%=177.2°</b>
Spacing	<b>0° = 1.28 90° = 1.40</b>

Photometric values based on tests performed in compliance with LM-63 & LM-79

### Candela Plot



ETI IES