

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

WR | 4' WRAPAROUND LIGHT

4000K

KEY FEATURES

Wrap Light features a low-profile, space-saving 4' design—ideal for tight spaces. Integrated slip tabs allow for easy lens removal, while quick-connects make installation fast and simple.

CCT & Light Quality

- 4000K | 80+ CRI

Light Output & Efficacy

- 3600 Lumens | 40W

Dimming, Controls

- 0-10V Dimming

SPECIFICATIONS

Construction

- Polycarbonate housing, white finish
- Low profile design

Optics

- Frosted, plastic lens

Installation

- Hardwire
- Surface mount hardware included

Electrical / Options

- 230,000 hour LEDs at L70 for reduced maintenance
- Operates at 120–277V, 50/60 Hz
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: ETISSL.com/warranty/



4' x 6"




KEY DATA	
LUMENS	3628
WATTAGE	39.9
EFFICACY (LPW)	91
REPORTED LIFE (HOURS)	L70 / 230,000

Certifications & Test Data

- cUS UL Rated, Damp location
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- DLC® (DesignLights Consortium) Listed. Please refer to DLC for specific product qualifications at www.designlights.org (Search by model number, 54676241)



CATALOG LOGIC

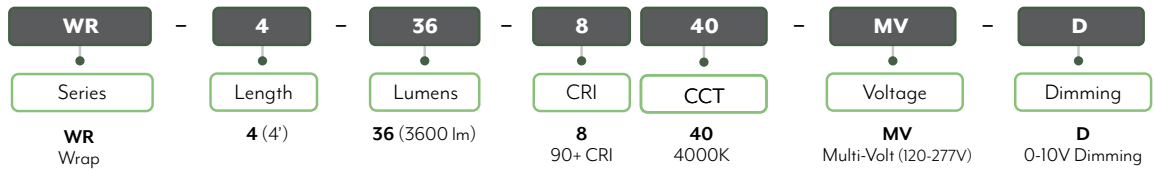


ORDER INFORMATION / SPEC DETAILS

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	VOLTAGE	DIMMING	CRI	CCT	NOMINAL WATTS	DELIVERED LUMENS	EFFICACY
WR-4-36-840-MV-D	54676241	4ft. Wrap Light	120-277V	0-10V	90+	4000K	40	3628	91


Notes: 1. For more delivered lumens and test data below, or visit etissl.com

BBU ACESORY (field install, sold separately)

CATALOG NUMBER	ORDER NUMBER	DESCRIPTION	DETAILS
EMA25FY-170 (G3)	70112202-2	25W Emergency LED Driver, IP rated, 90 minutes, Square	 <p>PRODUCT LISTING (located on ETISSL.com)</p>

Notes: 1. Also Compatible with 40W Emergency LED Driver, [EMA40FY-170 \(G3\) | 70114402-2](#)

DIMENSIONS / DETAILS

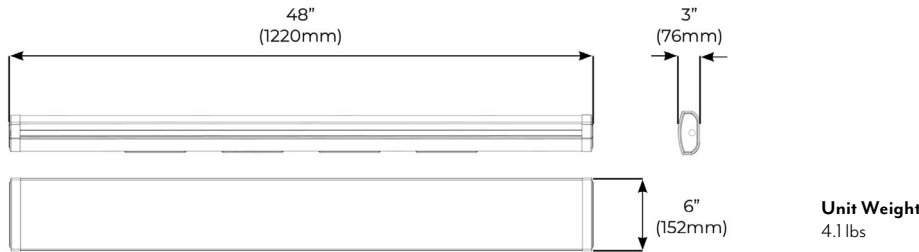

PERFORMANCE / DATA

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 92%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 230,000

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)

PHOTOMETRY

CCT & CRI	4000K, 90+ CRI
DELIVERED LUMENS	3628
WATTAGE	39.9
EFFICACY	91
SPACING	0° = 1.22 / 90° = 1.26

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

