

WR | 4' ECO WRAPAROUND LIGHT WITH OC SENSOR 4000K

KEY FEATURES

ETI's 4' ECO Wraparound Light with OC Sensor offers a low profile space saving solution. The integrated motion sensor has 2 minute and 10 minute hold times and detects motion up to 13-ft away from 10-ft mounting height

CCT & Light Quality

- 4000K | 80+ CRI

Light Output & Efficacy

- 3700 Lumens | 40W

Dimming, Controls

- Non-Dimmable
- Integrated Motion Sensor

SPECIFICATIONS

Construction

- Polycarbonate housing, white finish
- Low profile design

Optics

- Frosted, plastic lens

Installation

- Hardwire
- Surface mount hardware included
- OC Sensor Settings: Choose hold times between 2 min. or 10 min. Disable mode option

Electrical / Options

- >170,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60 Hz
- Operating Temperature: -4°F to 113°F (-20°C to 45°C)

Warranty

5-Year Standard Warranty. See terms at: ETISSL.com/warranty/

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	



4' x 5"




KEY DATA	
LUMENS	3705
WATTAGE	40
EFFICACY (LPW)	92
REPORTED LIFE (HOURS)	L70 / 171,000

Certifications & Test Data

- cUS UL Rated, Damp location
- Adheres to LM79, LM80, and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Driver rated for FCC part 15 Class B for use in residential or commercial applications



CATALOG LOGIC

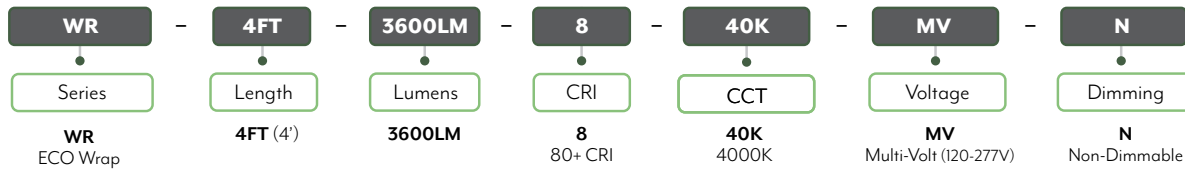


ORDER INFORMATION / SPEC DETAILS

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	VOLTAGE	DIMMING	CRI	CCT	NOMINAL WATTS	DELIVERED LUMENS	EFFICACY
WR-4FT-3600LM-8-40K-MV-N	56513242	4' ECO Wraparound Light with OC Sensor	120-277V	Non-Dimmable	80+	4000K	40	3705	92

Notes: 1. For more delivered lumens and test data see page 3, or visit etissl.com

DIMENSIONS / DETAILS

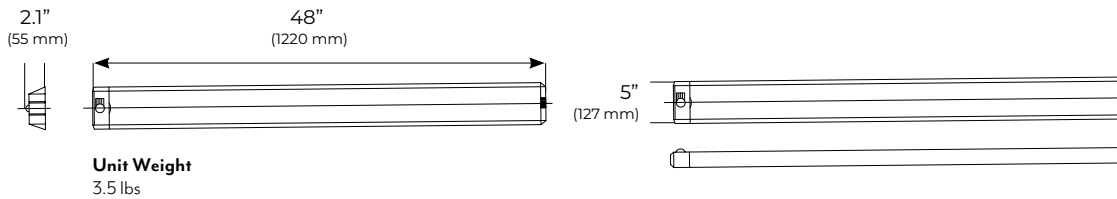

PERFORMANCE / DATA


Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 90%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 171,000


Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)


MOTION SENSOR DETAILS

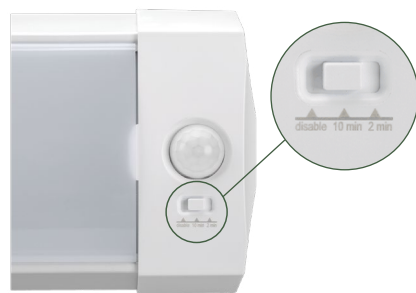

TOP VIEW

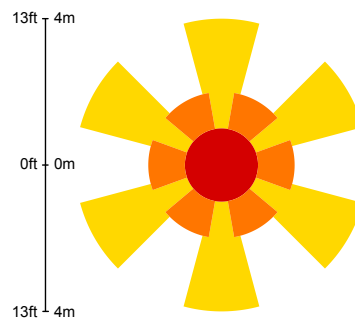

SIDE VIEW

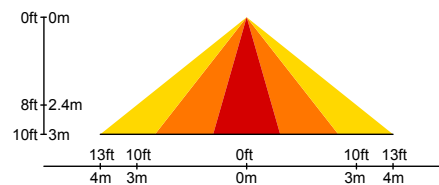

PHOTOMETRY

CCT & CRI	4000K, 80+ CRI
DELIVERED LUMENS	3704
WATTAGE	39.9
EFFICACY	92
SPACING	0° = 1.20 / 90° = 1.28

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot

