

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

## SL | 5" SPIN LIGHT® FLUSH MOUNT

4000K | E26 Base

### KEY FEATURES

Spin Light® converts a bare lamp holder into an LED flush mount fixture without rewiring. It installs by screwing into an existing lamp holder like a standard light bulb and includes a SPEEDMOUNT® bracket for remodel and new construction applications to convert a junction box into a lamp holder.

- This patented SpinLight® converts a bare lamp holder into a high-performing, energy-efficient, LED flush mount ceiling light
- SPEEDMOUNT® Kit included
- Damp Location Rated

### SPECIFICATIONS

#### Construction

- PC Housing and Shade
- E26 Medium Base

#### Optics

- High impact, acrylic shade for zero pixelation and overall visual comfort
- Uniform, even light distribution

#### Installation

- Twists into most E26 medium based socket/lamp holder (integrated E26 base)
- Also includes a SPEEDMOUNT® Kit for remodel and new construction installations—converts a junction box into a lamp holder

#### Electrical

- > 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Non-Dimmable
- Operating Temperature: -4°F to 104°F (-20°C to 40°C)

#### Warranty


5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)





KEY DATA	
Lumens	1611
Wattage	21.5
Efficacy Range (LPW)	75
Reported Life (Hours)	L70 / >50,000

#### Certifications & Test Data

- All luminaires are ETL Listed (US, C) for Damp Location
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)

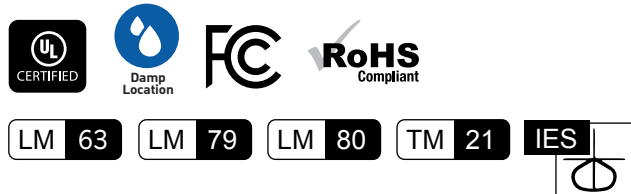

CATALOG LOGIC

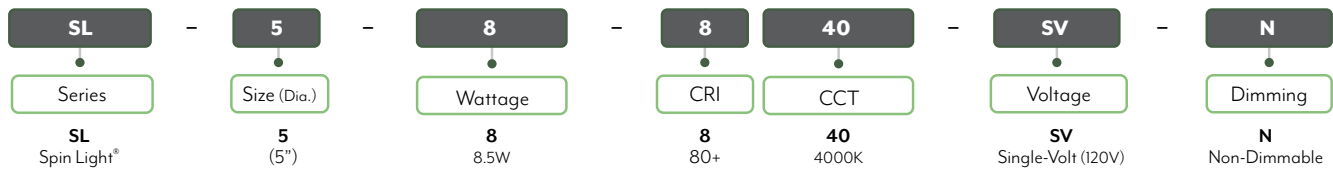


STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	CASE QTY	CRI	CCT	WATTS (NOM.)	LUMEN PKG. <sup>1</sup>	DELIVERED LUMENS	LPW	VOLTAGE	DIMMABILITY
SL-5-8-840-SV-N	54692142	5" Spin Light® Flush Mount	5	80+	4000K	8.5	600	686	89	120V	Non-Dimmable

Notes: 1. For more delivered lumens and test data see below, or visit etissl.com

DIMENSIONS / DETAILS

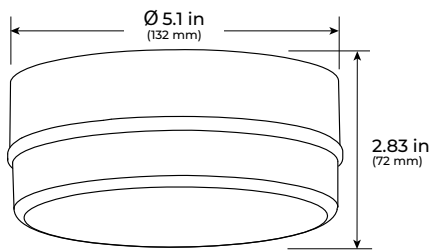

**Unit Weight**  
0.63 lb.

MOUNTING (Included)



QUICK AND EASY INSTALLATION

- Included:
- SpeedMount™ Socket
  - Mounting Plate Screws
  - Wire Connectors



Easily twists into existing lamp holder, just like a light bulb



PHOTOMETRIC SAMPLE




Luminaire Data: at 4000K

CCT & CRI	4000K, 80+ CRI
DELIVERED LUMENS	686
WATTAGE	7.7W
EFFICACY	89
BEAM ANGLE	50%= 128.7° 10%= 89.0°
SPACING	0° = 1.35 90° = 1.34

Photometric values based on tests performed in compliance with LM-63 & LM-79

Candela Plot



PERFORMANCE / Data

Lumen Maintenance

Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 80%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 50,000

Load Information

Power Factor	> 0.90
THD	< 20%
Frequency	60 Hz
Low Temp Start / Max Temp	-4°F to 113°F (-25°C to 45°C)