

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

FME | 11" OUTDOOR FLUSH MOUNT WITH PIR MOTION SENSOR

DUSK TO DAWN | 5 CCT COLOR PREFERENCE®

KEY FEATURES

ETI's 11" Outdoor Flush Mount is wet location rated, withstands cold temperatures down to -4°F (-20°C), and comes with integrated PIR motion sensor with three settings.

- ETI's TwistFit™ Mounting System for easy installation
- ETI's patented Color Preference with 5 Selectable CCTs (2700K, 3000K, 3500K, 4000K, 5000K)
- PIR Motion Sensor | Dusk-to-Dawn
- Detects motion up to 15 feet away
- 3 Settings: Motion Mode, Dusk to Dawn (DTD) Mode, and Disable

SPECIFICATIONS

Construction

- Modern fixture with white or black trim
- White acrylic shade

Optics

- Diffuser lens for zero pixelation and overall visual comfort
- Uniform, even light distribution

Installation and Function

- TwistFit™ Surface mount kit included:
 - TwistFit Mounting Bracket
 - Mounting screw and wire connectors
- Choose from 5 field-selectable CCTs—2700/3000/3500/4000/5000K
Factory set at 2700K
- Choose from 3 PIR Motion Sensor settings:
Motion Mode, Dusk to Dawn (DTD) Mode, and Disable

Electrical

- 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Operating temperature: -20°C (-4°F) / 45°C (113°F)
- Dimmable—TRIAC
- ETI's patented 5 CCT COLOR PREFERENCE® allowing for easy field-adjustable color temperature selection with switch located on back of luminaire
- 3 Dusk to Dawn PIR Sensor settings located on back of luminaire

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

KEY DATA	
Lumen Package	830
Wattage (Nominal)	11.5
Efficacy (LPW)	72
Reported Life (Hours)	L70 / 50,000



PIR Motion Sensor | Dusk-to-Dawn
Detects Motion up to 15 ft Away and has 3 Modes of Operation




Certifications & Test Data

- cULus Listed for Wet Location
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- IC Rated for direct contact with insulation




CATALOG LOGIC

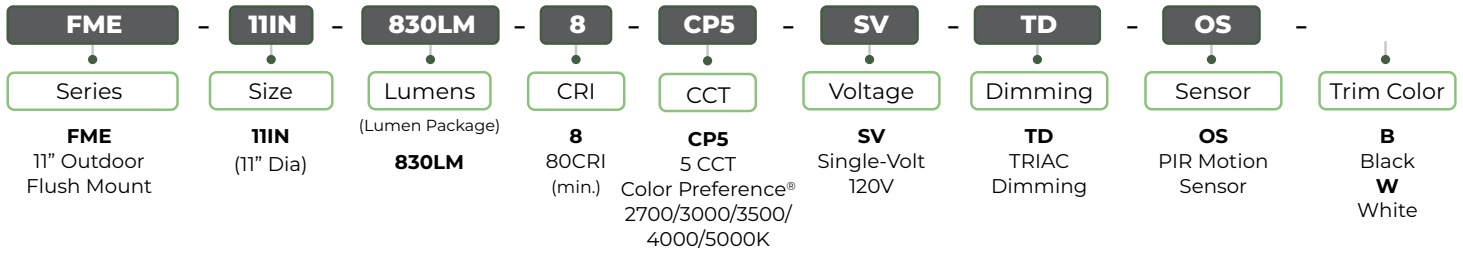

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Trim Color	Case QTY	Lumen Package	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dim
FME-11IN-830LM-8-CP5-SV-TD-OS-B	564281030	Black	2	830	11.5	72	2700K 3000K 3500K 4000K 5000K	80 (min)	120V	TRIAC
FME-11IN-830LM-8-CP5-SV-TD-OS-W	564281040	White	2	830	11.5	72	2700K 3000K 3500K 4000K 5000K	80 (min)	120V	TRIAC


DIMENSIONS / DETAILS

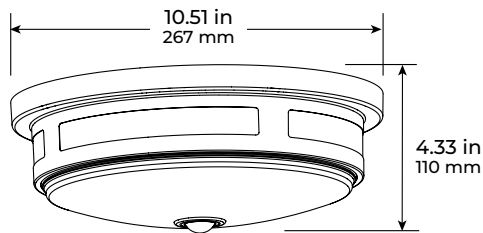

Unit Weight
1.17 lbs.



QUICK AND EASY INSTALLATION

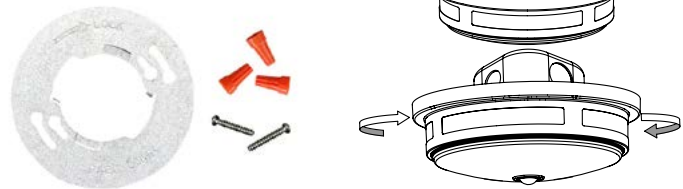

FIELD-SELECTABLE CCT

Factory set to 2700K.



MOTION SENSOR / DUSK-TO-DAWN SETTINGS

Motion Mode

Fixture will turn on at dusk, then drop to 30% lumen output until motion detected. Once motion is sensed, lumen output boosts to 100% and holds for 5 minutes until motion is no longer detected.

Dusk-to-Dawn Mode (DTD)

Fixture will come on at 100% lumen output when darkness is sensed.

Disable Mode

Works as typical light fixture with motion and DTD disabled. Fixture can be set to 30% light output and 100% by toggling light switch within 3 seconds.