

DATE:	PROJECT:
TYPE:	NOTES:
CATALOG #:	

MBRT | 9" RECTANGULAR BULK HEAD

3 CCT COLOR PREFERENCE® | 2 LUMEN BOOST®

KEY FEATURES

ETI's Marine Bulkheads are engineered for durability in the toughest environments. A rugged polycarbonate base resists rust and corrosion, while 3 selectable CCTs and 2 selectable lumen levels, provide versatile lighting control.

- ETI's patented Color Preference with 3 Selectable CCTs (3000K, 4000K, 5000K)
- 2 Selectable Light Levels (100% and 50%)
- Wet Location

SPECIFICATIONS

Construction

Corrosion-resistant polycarbonate base

Optics

- Frosted Glass
- Uniform, even light distribution

Installation and Function

- Mounting hardware included
- Choose from 3 field-selectable CCTs—3000/4000/5000K
Factory set at 3000K

Electrical

- > 200,000 hour LEDs at L70 for reduced maintenance
- Operates at 120-277V, 50/60Hz
- Operating temperature: -20°C (-4°F) / 45°C (113°F)
- Non-Dimmable
- ETI's patented 3 CCT COLOR PREFERENCE® allowing for easy field-adjustable color temperature selection with switch located on side of luminaire

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

KEY DATA	
Lumen Range	836 – 955
Wattage Range	6.9 – 7.2
Efficacy (LPW) Range	119 – 133
Reported Life (Hours)	L70 / > 200,000



Features



Certifications



Certifications & Test Data

- cULus Listed for Wet Location
- Driver rated for FCC part 15 Class B for use in residential or commercial applications

MBRT | 9" RECTANGULAR BULK HEAD | 3 CCT COLOR PREFERENCE® | 2 LUMEN BOOST®

CATALOG LOGIC




Notes:
1. Ships at 3000K CCT. Installing contractor responsible for ensuring desired CCT selected during installation.

STOCK ORDERING INFORMATION

CATALOG PART NUMBER	ORDER NUMBER	DESCRIPTION	VOLTAGE	DIMMING	CRI	DLC	CCT	NOMINAL WATTS	LUMEN PACKAGE	DELIVERED LUMENS	EFFICACY
MBRT-9IN-2LB-8-3CP-MV-WT	504091120	9" Rectangular Bulk Head	120-277V	Non-Dimmable	80+	Standard	3000K	5	600	741	132
								11	1200	1561	144
						Standard	4000K	5	600	768	140
								11	1200	1414	135
						Standard	5000K	5	600	774	138
								11	1200	1387	138

Notes: 1. For more delivered lumens and test data see pages 3, or visit etissl.com

DIMENSIONS / DETAILS

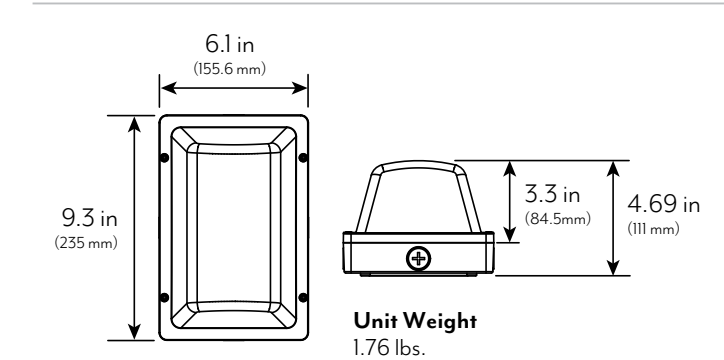


MOUNTING HARDWARE INCLUDED



PERFORMANCE / DATA

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	> 90%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	> 200,000
Load Information	
Power Factor	> 0.90
THD	< 20%
Frequency	50/60 Hz
Low Temp Start / Max Temp	-4°F to 113°F (-20°C to 45°C)

PHOTOMETRIC SAMPLE

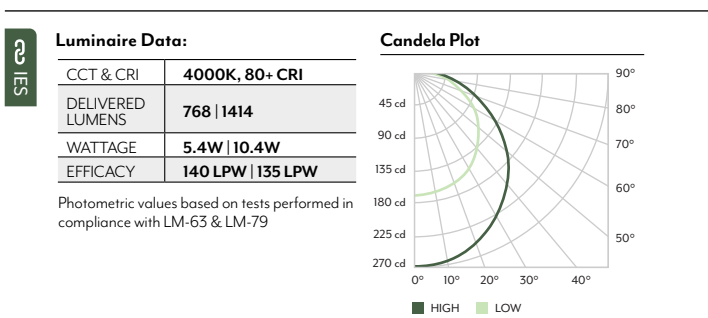



ETI Lighting
4873 Thurmon Tanner Parkway,
Flowery Branch, GA 30542

855.384.7754 | www.etissl.com
Quotes: quotes@etissl.com
Orders: etiorders@etissl.com

Technical Support:
etitech@etissl.com

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.
Marine_Bulkhead_504091120 | Page 3 of 3 | July 15, 2026