



PRODUCT OVERVIEW

ETI Lighting's Altair Canless Downlights and Gimbal Canless Downlights deliver quality, flexibility, and easy installation for **residential and commercial** applications. Available in single- and multi-volt configurations, with high-output 6-inch options and adjustable gimbal models.

Designed for new construction, remodel, and retrofit projects, these low-profile luminaires install directly into drywall or drop ceilings—eliminating the need for a recessed housing or secondary junction box.

Featuring **5 Color Preference®**, 90+ CRI, a modern appearance, and wet-location rating, Altair downlights are ideal for multifamily, residential, hospitality, office, and other commercial applications.



ETI Lighting
4873 Thurmon Tanner Parkway
Flowery Branch, GA 30542

1.855.384.7754 | www.etissl.com
Quotes: quotes@etissl.com
Orders: etiorders@etissl.com

Technical Support:
etitech@etissl.com

Follow us!



PERFORMANCE SUMMARY					
Product	Size (dia.)	Lumen Pkg.	Wattage	CCT (CP5)	Dist. Plot
ALCD	4"	800	10	2700K 3000K 3500K 4000K 5000K	
ALCD	6"	800	10		
ALCD	6" High Output	1200	14		
ALCD	8"	1600	19		
ALCG	4"	650	8		
ALCG	6"	950	12		

ELECTRICAL DATA

Operation: 120V, 60Hz and 120-277V, 50/60Hz options

Operating Temperature: -20°C (-4°F) / 40°C (104°F)

Controls: TRIAC dimming, down to 10% (120V), 0-10V Dimming (120-277V)

L70 > 110,000 hours

CERTIFICATIONS & OTHER INFO

ETL Listed (US,C), Wet Location, Air Tight Certified

ALCD items are ETL Listed (US/C) / ALCG are UL Listed (US/C)

ENERGY STAR® rated & JA8 Title 24 Compliant


IC Rated for direct contact with insulation

Warranty: 5 year

90+ CRI



Residential 120V, TRIAC and Commercial 120-277V, 0-10V options

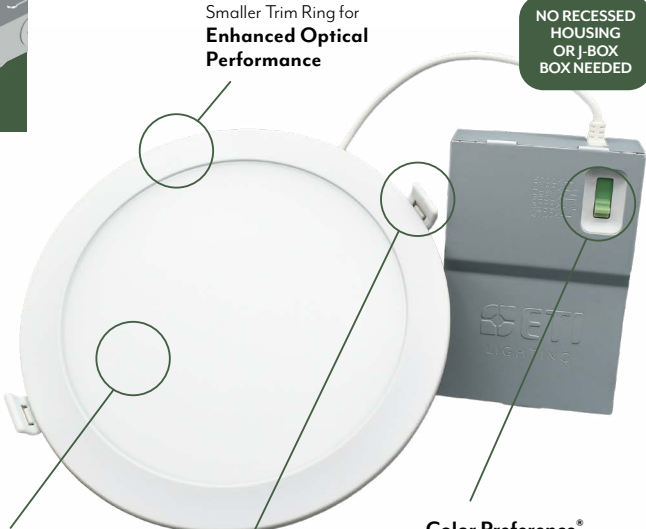

Smaller Trim Ring for Enhanced Optical Performance

NO RECESSED HOUSING OR J-BOX BOX NEEDED

High-Impact PC Diffuser Lens
offers zero pixelation and overall visual comfort

Color Preference® 5 Field-Selectable CCTs
switch located on J-Box

Spring Retention Clips
Two low-profile spring retention clips provide a secure fit



8"

6"

4"

6" Available in Standard and High Output



6"

4"



25° TILT
355° ROTATION

ACCESSORIES



Black and Satin Nickel Trims
(available for all sizes)



New Construction Frame with Bar Hangers
(available for 4", 6" and 8")



Rough-in Guide Plates for New Construction
(available for all sizes)



12 ft. and 20 ft.
Extension Cables



25W Battery Backup

(order separately)

VOLTAGE / DIMMING OPTIONS

Single-Volt (120V) with TRIAC Dimming

Multi-Volt (120-277V) with 0-10V Dimming