

RETROFIT DOWNLIGHT

WITH E26 SOCKET ADAPTER | 2700K

KEY FEATURES

- Included E26 base makes retrofit installation easy and efficient
- Triac dimming down to 10%—quiet and flickering free
- Wet location rated
- Clean, tight-fitting integrated LED trim freshens up old fixtures
- IC Rated for maximum thermal management

SPECIFICATIONS

Construction

- Durable die-cast aluminum housing design for maximum thermal management and performance
- Suitable for IC or Non-IC applications
- Matte white finish, baffle trim

Optics

- Polycarbonate diffused lens
- Smooth, uniform light distribution

Installation

- Two friction clips included, and spring clips included for the 5/6"
- Easy to install—simply twist E26 base into existing socket

Electrical

- 50,000 hour LEDs at L70 for reduced maintenance
- Operates at 120V, 60Hz
- Triac dimming, down to 10%*
- Operation temperature: -4°F (-20°C) to 113°F (45°C)

* Always consult dimmer manufacturer for proper use, installation and compatibility (some dimmers may require a neutral in the wall box).

Warranty

5-Year Standard Warranty. See terms at: [ETISSL.com/warranty/](https://www.etissl.com/warranty/)

5/6"



Features



2700K



Certifications



LM 63

LM 79

LM 80

TM 21



Certifications & Test Data

- All luminaires are built to UL 1598 standards and have the appropriate
- Non-Dimmable
- Adheres to LM63, LM79, LM80 and TM21 industry standards for photometric, lumen maintenance and lifetime calculations
- Driver rated for FCC part 15 Class B for use in residential or commercial applications
- IC Rated for direct contact with insulation
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements

KEY DATA	
Lumen Range	763.5
Wattage Range	9.7
Efficacy Range (LPW)	72
Reported Life (Hours)	L70 / 50,000
Input Current (mA)	88

Retrofit Downlight WITH E26 SOCKET ADAPTER | 2700K

CATALOG LOGIC

DL

Series

DL

Downlight
(Retrofit)

-

6

Size

6 (5/6" Dia)

-

67

Lumens

67 (670 lm)

-

827

CRI

8
80CRI
(min.)

-

27

CCT

27 (2700K)

-

SV

Voltage

SV
Single-Volt
120V

-

D

Dimming

D
TRIAC
Dimming


Notes:
1. Factory set at the lowest CCT. Installing contractor responsible for ensuring desired CCT is selected during installation.

STOCK ORDERING INFORMATION

Catalog Part Number	Order Number	Size (Dia)	Case QTY	Lumen Package	Delivered Lumens ²	Wattage (Nominal)	Efficacy	CCT	CRI	Voltage	Dim	ENERGY STAR® / UL
DL-6-67-827-SV-D	53193101	5/6"	4	670	763.5	9	72	2700K	80 (min)	120V	TRIAC	ESTAR Search: 531931## UL Search: 531931XX

Notes: 1. For more information and test data below, or visit ETISSL.com

DIMENSIONS / DETAILS

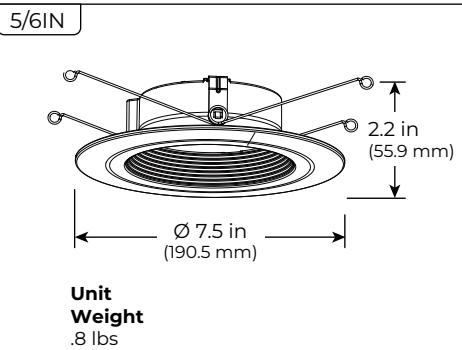

PERFORMANCE / Data

Lumen Maintenance	
Ambient Temp.	TM-21 Lumen Maintenance (54,000 hours)
25° C (77° F)	4" 67% 5/6" 88%
Ambient Temp.	TM-21 Theoretical L70 (hours)
25° C (77° F)	50,000

Load Information	
Power Factor	>.90
THD	< 20%
Frequency	60 Hz
Sound Rating	< 20 dBA
Low Temp Start / Max Temp	-20° C (-4° F) / 45° C (113° F)

5/6IN

ETIS

Luminaire Data: 5/6"

CCT & CRI	2700K, 80+ CRI
Delivered Lumens	763.5
Wattage	9.7W
Efficacy	72
Beam Angle	50%=101° 10%= 146°
Spacing	0° = 1.24 90° = 1.22

Photometric values based on tests performed in compliance with LM-63 & LM-79

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	238.51	31.2%
0-40	385.55	50.5%
0-60	645.42	84.5%
0-90	748.67	98.1%

Candela Plot

Candela Distribution

Angle	0°	90°
0	311	311
5	309	309
10	305	305
15	297	297
20	287	285
25	273	271
30	256	254
35	236	234
40	213	210
45	187	184
50	159	156
55	131	127
60	102	97
65	72	67
70	44	40
75	23	20
80	13	11
85	7.1	5.1
90	2.4	1.1

% Effective Ceiling Cavity Reflectance

Ceiling	80%			70%			50%			30%			10%			0%		
Wall	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR	Zonal cavity method—Effective floor reflectance = 20%																	
0	119	119	119	119	116	116	116	116	110	110	110	105	105	105	100	100	100	98
1	110	105	102	98	107	103	100	96	98	96	93	94	92	90	90	89	87	85
2	101	93	87	82	98	91	85	81	87	83	79	84	80	76	81	77	75	72
3	92	83	75	69	90	81	74	68	78	72	67	75	70	66	72	68	64	62
4	85	74	66	59	83	72	65	59	70	63	58	67	61	57	65	60	56	54
5	78	66	58	52	76	65	57	51	63	56	50	61	54	50	59	53	49	47
6	72	60	51	45	70	59	51	45	57	50	44	55	49	44	53	48	43	41
7	67	54	46	40	66	54	46	40	52	45	40	50	44	39	49	43	39	37
8	63	50	42	36	61	49	41	36	48	41	36	46	40	35	45	39	35	33
9	59	46	38	32	57	45	38	32	44	37	32	43	36	32	42	36	32	30
10	55	42	35	30	54	42	34	29	41	34	29	40	33	29	39	33	29	27