

Wire Guards:(purchase seperately)

To attach wire guards to the luminaire, snap onto the adjustable head overtop of the lenses.

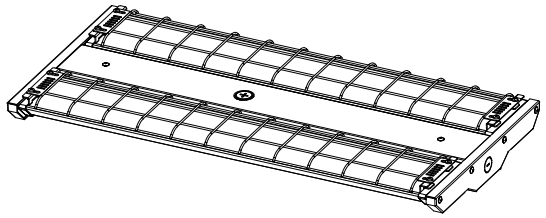


Light Direction Adjustment:

After the fixture is installed, adjust the lighting direction of the module according to your needs (145° maximum adjustment from left to right).




Power & CCT Adjustment:

Toggle the DIP switch to the corresponding gear as needed to change the Power and CCT

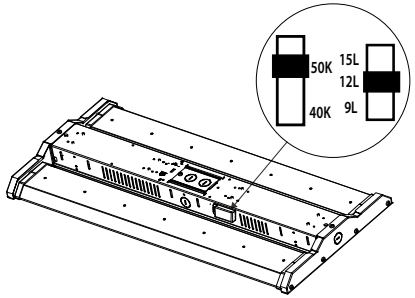

Wiring Diagram

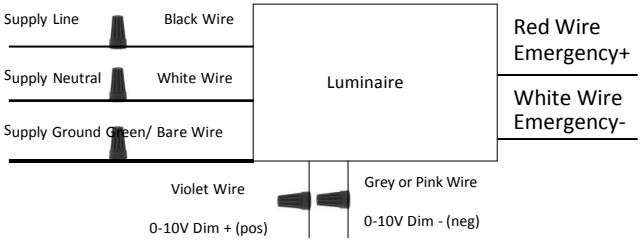

For dimming wires, use class 1 wiring methods.
Cap dimming wires (separately) if not used.

SAVE THESE INSTRUCTIONS

ADJUSTABLE LINEAR HIGH BAY

INSTALLATION INSTRUCTIONS

CAUTION:

1. Read all instructions before starting installation.
2. This product must be installed in accordance with the applicable installation codes by a qualified electrician familiar with the construction and operation of the product and the hazards involved.
3. Disconnect power at circuit breaker of fuse before starting installation.
4. To avoid injury, wear gloves during installation.
5. To reduce the risk of electrical shock and product damage, do not install this luminaire during rain or other storms.
6. Do not test luminaire using an electric generator before installation.

Instructions:

Chain Mount:(included)

To suspend the highbay luminaire from chains, attach the enclosed v-hooks to the holes on the end caps. Attach the chain to a secure, stationary structure, and use the spring clips on the end to attach the chain to the v-hooks. Choose the appropriate knock out, and wire the fixture in accordance with proper code. (Figure 1)


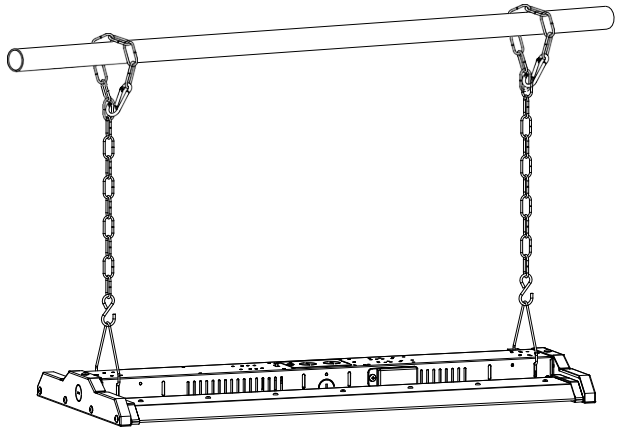


Figure 1

Cable Mount:(purchase seperately)

To suspend the highbay luminaire from cables, slide the button stop attached to the end of the cable kit through the hole in the end cap. Then, slide the rectangular plate installed on the cable through the same hole. Attach the cable to a secure, stationary structure. Use the spring slide to adjust the height. Choose the appropriate knockout, and wire the fixture in accordance with proper code.

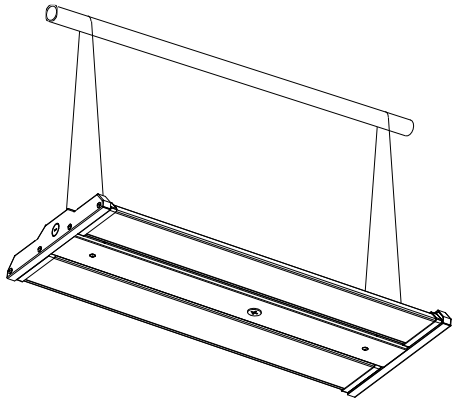

Surface Mount:(purchase seperately)

To surface mount the highbay luminaire, bolt the fixture brackets to the ceiling or rail (Figure 1). Once the brackets have been properly secured, attach the luminaire using the screws provided (Figure 2). Choose the appropriate knockout, and wire the fixture in accordance with proper code.

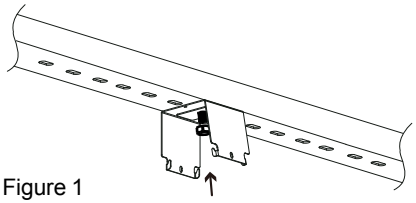


Figure 1

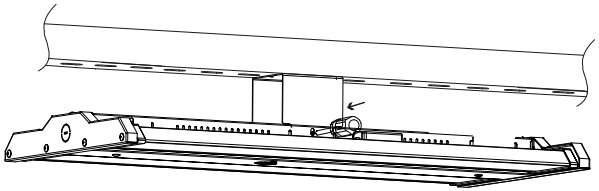


Figure 2

Pendant Mount:(purchase seperately)

To pendant mount the highbay luminaire, mount the fixture brackets to 1/2”NPS (Figure 1). Once the brackets have been properly secured, attach the fixture using the screws provided (Fixture 2). Choose the appropriate knockout, and wire the fixture in accordance with proper code. Secure the cover plates to the bracket using the screws provided.




Figure 1

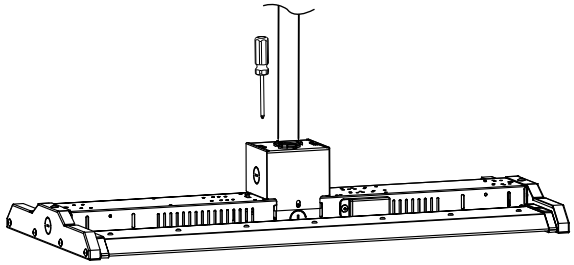


Figure 2

Motion Sensor: (purchase seperately)

To install the sports sensor, first unscrew the sensor base with a screwdriver (FIGURE 1). Tighten the sensor clockwise and install it (FIGURE 2).

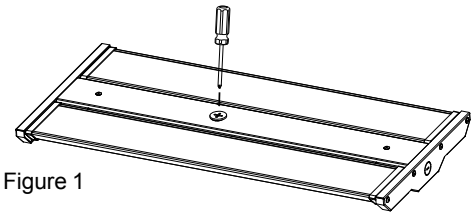


Figure 1

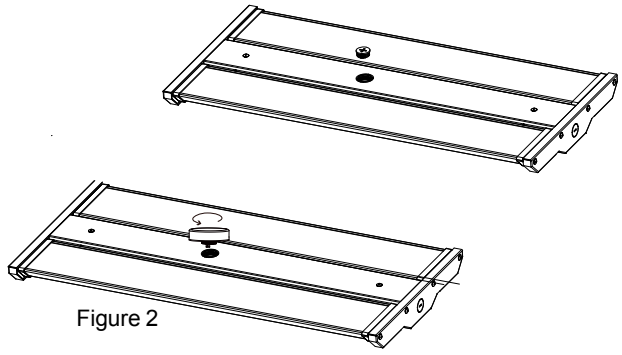


Figure 2