| | |
|---|---|
| DATE: | PROJECT: |
| TYPE: | NOTES: |
| CATALOG #: | |

# RECHARGEABLE LED ACCENT SCONCE

3 COLOR PREFERENCE® | TOUCH DIMMING

## KEY FEATURES

USB powered LED accent sconce with selectable white light, touch control and adjustable magnetic mounting system

**CCT & Light Quality**

- 3 selectable CCTs (3000K / 4000K / 5000K)
- CRI: 80

**Light Output & Efficacy**

- Rated light output: 450 lumens
- Rated power: 4.8W
- Calculated efficacy: approximately 94 lm/W (450 lm/W)

**Controls**

- Short press (<1 second) for on/off, CCT selection
- Press and hold (>1.3 seconds) to brighten to 100%

**Voltage**

- USB charging input: DC5V, 2A

## SPECIFICATIONS

**Construction**

- Plastic housing; walnut wood finish
- Universal head bracket and magnetic base

**Optics**

- Frosted lens
- Selectable warm, neutral, and cool white light

**Installation**

- Wall mounting using adhesive tape, magnetic attachment, or screws
- 360° horizontal rotation and +/-20° vertical tilt
- Indoor dry locations only

**Electrical / Options**

- Integrated rechargeable lithium-ion battery
- (1) USB-C charging cable included; USB power adapter not included
- Full charge: approximately 4.5 hours
- Charge indicator: red while charging; green when fully charged
- Operating temperature: 35°F to 95°F (0°C to 35°C)
- Reported lifetime: 10,000 hours; rating basis not supplied

**Warranty**

5-Year Standard Warranty. See terms at: ETISSL.com/warranty/






**Rechargable USB-Port**

Charging indicator will glow **green** when fully charge and **red** as the wall sconce is charging

| KEY DATA | |
|---|---|
| LUMEN RANGE | 450 LM / 4.8W |
| CCT / CRI | 3000K / 4000K / 5000K / 80 |
| CHARGING INPUT | DC5V, 2A |
| REPORTED LIFE (HOURS) | 10,000 HRS |

3 Color Preference®

**Certifications & Test Data**

- FCC Part 15 compliance
- IC Rated frdirect contact with insulation

ETI Lighting
4873 Thurmon Tanner Parkway,
Flowery Branch, GA 30542

855.384.7754 | www.etissl.com
**Quotes:** quotes@etissl.com
**Orders:** etiorders@etissl.com


All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.

## STOCK ORDERING INFORMATION

| ORDER NUMBER | DESCRIPTION | VOLTAGE | DIMMING | CRI | CCTS | NOMINAL WATTS | LUMEN PACKAGE (NOMINAL) | DELIVERED LUMENS | EFFICACY |
|---|---|---|---|---|---|---|---|---|---|
| C12003402A | Rechargeable LED Accent Sconce | DC5V, 2A | N/A | 80 | 3000K / 4000K / 5000K | 4.8 | 450W | 450 | 90LM/W |

## DIMENSIONS

| PRODUCT LENGTH | PRODUCT WIDTH | PRODUCT HEIGHT | PRODUCT WEIGHT |
|---|---|---|---|
| 5.91 in (150.11mm) | 1.20 in (30.48 mm) | 1.67 in (42.32mm) | 0.40 lb |

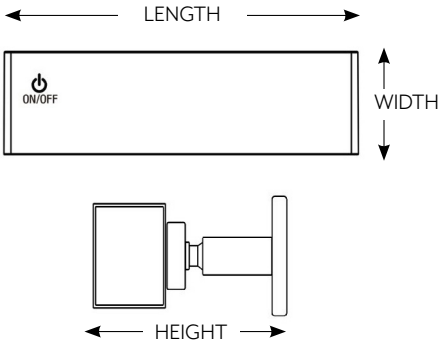


# MOUNTING SETUP OVERVIEW

## MOUNTING

- Mount with double-sided tape, tape and metal plate, magnetic attachment, or screws and anchors
- For screw mounting: two 1/8-inch pilot holes, spaced 1.18 inches apart. Anchors are for drywall or plaster
- Select a clean, dry wall surface capable of supporting the fixture; do not mount over beds or on wall paper
- Rotate clockwise during assembly / adjustment to avoid loosening

## INCLUDED COMPONENTS

| FIXTURES | BRACKETS / BASES | TAPE / METAL PLATES | SCREWS / ANCHORS | CHARGING CABLE |
|---|---|---|---|---|
| 2 | 2 EACH | 2 EACH | 4 EACH | 1 USB-C CABLE |

# PERFORMANCE & DATA

## RATED LIGHT OUTPUT & LIFE

| PARAMETERS | SUPPLIED RATING |
|---|---|
| LIGHT OUTPUT | 450 lm |
| INPUT POWER | 4.8W |
| CALCULATED EFFICACY | 93.75 lm/W (APPROX. 94) |
| COLOR TEMPERATURE | 3000K / 4000K / 5000K |
| CRI | 80 |
| REPORTED LIFETIME | 10,000 HOURS |

## CHARGING & OPERATING INFORMATION

| PARAMETER | DETAIL |
|---|---|
| CHARGING INPUT | DC5V, 2A |
| BATTERY TYPE | LITHIUM-ION |
| CHARGING CONNECTION | USB-C |
| FULL CHARGE TIME | APPROX. 4.5 HOURS |
| OPERATING INDICATOR | RED = CHARGING<br>GREEN = FULLY CHARGED |
| USE LOCATION | INDOOR / DRY |

## DIMMING / CONTROL

| ACTION | FUNCTION |
|---|---|
| SHORT PRESS (<1 SECOND) | ON/OFF OR SELECT 3000K / 4000K / 5000K |
| PRESS AND HOLD (>1.3 SECONDS) | BRIGHTEN TO 100% |

ETI LIGHTING
ETI Lighting
4873 Thurmon Tanner Parkway,
Flowery Branch, GA 30542

855.384.7754 | www.etissl.com
**Quotes:** quotes@etissl.com
**Orders:** etiorders@etissl.com

All specifications are subject to change without notice.
All reported values are typical values, measured under laboratory conditions @ 25° C (77° F).
Actual performance can vary slightly as a result of end-user application & environment.