



**IESNA
SUSTAINING
MEMBER**

Ref. No.: LCZP18040249
Version: 1.0
Date of issue: May. 11, 2018
Total pages: 8

Test report of

IES LM-79-08

Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products

Rendered to:

Elec-Tech International Co., Ltd.
No.1 Jinfeng Road, Tangjiawan Town, Xiangzhou District,
Zhuhai City, Guangdong Province, P.R. China 519085

For products:

Four-Foot Linear Replacement Lamps

Models No.:

542224XX(XX=61-70)

(Where XX denotes CCT and could be 61-70 which refer 5000K)

Test Date: Apr. 28, 2018
Test Item: Total luminous flux, Luminous Efficacy, Electrical values, Chromaticity coordinates, CCT and CRI, Spectral Power Distribution.
Test Lab.: **LCTECH (Zhongshan) Testing Service Co., Ltd**
2/F., Technology and Enterprise Development Center, Guangyuan Road, Xiaolan, Zhongshan, Guangdong, China
Tel:+86-760-22833366 Fax:+86-760-22833399
E-mail:Service@lccert.com http://www.lccert.com
Template No.: LC-RT-PL-005 Rev.1.0
Test Note:

Complied by:

Fish Tan

Project Engineer

May. 11, 2018

Reviewed by:

Richard Li

Technical Manager

May. 11, 2018

The duplication of this report or parts of it and its use for advertising purposes is only allowed with permission of the testing laboratory. This report contains the result of the examination of the product sample submitted by the applicant. A general statement concerning the quality of the products from the series manufacture cannot be derived therefore. This report must not be used by the customer to claim product certification, approval or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Table of Contents

1. General	3
1.1 Product Information.....	3
1.2 Standards or methods.....	4
1.3 Equipment list.....	4
2. Test conducted and method	5
2.1 Ambient Condition.....	5
2.2 Power Supply Characteristics.....	5
2.3 Seasoning and Stabilization.....	5
2.4 Electrical Instrumentation.....	5
2.5 Color Measurement Method.....	5
2.6 Total Luminous Flux Measurement Method.....	5
2.7 Luminous Intensity Distribution Measurement Method.....	5
2.8 Spatial Non-uniformity of Chromaticity.....	5
3. Test Result Summary	6
3.1 Electrical data.....	6
3.2 Photometric data.....	6
3.3 Color Rendering Details.....	6
3.4 Electrical data.....	6
4. Test Data	7
4.1 Spectral Distribution.....	7
4.2 ANSI Chromaticity Quadrangles Diagram.....	7
Appendix 1 Product Photo	8



1. General

1.1 Product Information

Brand Name	ETI
Product Type	T8 Four- Foot Linear Replacement Lamps-Internal Driver/Line Voltage Lamp - Style Retrofit Kits (UL Type B)
Model Number	542224XX(XX=61-70)
Rated Inputs	120-277VAC, 50/60Hz
Rated Power	12W
Rated Light output	1800lm
Declared CCT	5000K
Power Supply	Integrated in lamp
LED Package, Array or Module	67-21S Series (3000K), EVERLIGHT ELECTRONICS CO., LTD
Receipt Samples	1 unit
Sample Code of lab.	180427105005
Date of Receipt Samples	Apr. 27, 2018
Note	-



1.2 Standards or methods

The following standards are partly or totally used or referenced for test:

No.	Name
ANSI/NEMA/ ANSLG C78.377-2015	Specifications for the Chromaticity of Solid State Lighting Products
ANSI C82.77-2002	Harmonic Emission Limits—Related Power Quality Requirements for Lighting Equipment
CIE Pub. No. 13.3-1995	Method of Measuring and Specifying Color Rendering of Light Sources
CIE Pub. No. 15:2004	Colorimetry
IES LM-79-08	Electrical and Photometric Measurements of Solid-State Lighting Products

1.3 Equipment list

Instrument	ID	Model name	Cal. date	Next cal. Date
AC Power supply	LC-I-923	CHP-500	2018-01-10	2019-01-09
AC Power supply	LC-I-987	APW-110N	2018-01-10	2019-01-09
Power analyzer	LC-I-928	WT210	2018-01-05	2019-01-05
Power analyzer	LC-I-954	WT210	2018-01-10	2019-01-09
Multimeter	LC-I-972	Fluke 17B	2017-08-08	2018-08-07
Photometric colorimetric electric system (2 meter sphere)	LC-I-900	SPR3000	Before use	Before use
Standard lamp	LC-PL-I-002	24V100W	2017-09-07	2018-09-06
Luminous Flux Standard Lamp	LC-PL-I-001	110V/200W	2017-09-22	2018-09-21
Goniophotometer(with mirror)	LC-I-902	GMS2000	2018-05-07	2019-05-06
Wireless temperature transmitter	LC-I-978	DWRF-B	2018-02-10	2019-02-09
Wireless temperature transmitter	LC-I-979	DWRF-B	2018-02-10	2019-02-09

2. Test conducted and method

The lamp was operated at least 2 hours to reach stabilization and temperature equilibrium before test.

2.1 Ambient Condition

The ambient temperature in which measurements are being taken was maintained at $25\text{ }^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$; the air flow around the sample(s) being tested did not affect the performance.

2.2 Power Supply Characteristics

The AC power supply had a sinusoidal voltage wave shape at the prescribed frequency (60 Hz) such that the RMS summation of the harmonic components does not exceed 3 percent of the fundamental during operation of the test item.

The voltage of AC power supply (RMS voltage) applied to the device under test was regulated to within ± 0.2 percent under load.

2.3 Seasoning and Stabilization

No seasoning was performed in accordance with IESNA LM-79-08. And before the measurement, the sample was stabilized until the light output and power variations were less than 0.5% in 30 minutes intervals (3 readings, 15 minutes apart).

2.4 Electrical Instrumentation

The calibration uncertainties of the instruments for AC voltage and current were less than 0.2 percent, and the calibration uncertainty of the AC power meter was less than 0.5 percent (95 % confidence interval, $k=2$).

2.5 Color Measurement Method

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the color characteristics (Color rendering index, correlated color temperature, chromaticity coordinate) were calculated from these by software automatically.

2.6 Total Luminous Flux Measurement Method

Total luminous flux was measured by sphere-spectroradiometer system.

Spectral radiant flux was measured by a sphere (2 meter)-spectroradiometer system, and the total luminous flux was calculated from these by software automatically.

2.7 Luminous Intensity Distribution Measurement Method

The customer did not require this measurement.

2.8 Spatial Non-uniformity of Chromaticity

The customer did not require this measurement.



3. Test Result Summary

3.1 Electrical data

Criteria Item	Result
Input Voltage & Frequency	120.00 V~60Hz
Input Current(A)	0.102
Total Power(W)	12.13
Power Factor	0.989
I-THD	13.75%
Off-state Power(W)	-

3.2 Photometric data

Criteria Item	Result
Total Lumens(lm)	1825.30
Luminaire Efficacy(Lm/W)	150.48
Correlated Color Temperature (CCT)(K)	5028
Color Rendering Index (CRI)	84.8
R9	14
Chromaticity Coordinate (x,y)	x = 0.3448 y = 0.3566
Chromaticity Coordinate (u,v)	u = 0.2093 v = 0.3247
Chromaticity Coordinate (u',v')	u' = 0.2093 v' = 0.4870
Duv	0.0026
Spacing Criteria(0-180°)	-
Spacing Criteria(90-270°)	-
Zone Lumens between 0-60 °	-

3.3 Color Rendering Details

R1	R2	R3	R4	R5	R6	R7	R8
83	91	95	84	84	86	87	69
R9	R10	R11	R12	R13	R14	R15	-
14	77	83	64	85	97	78	-

3.4 Electrical data


Criteria Item	Result
Input Voltage & Frequency	277.00 V~60Hz
Power Factor	0.924
I-THD	19.85%

Note: N.A.




4. Test Data

4.1 Spectral Distribution

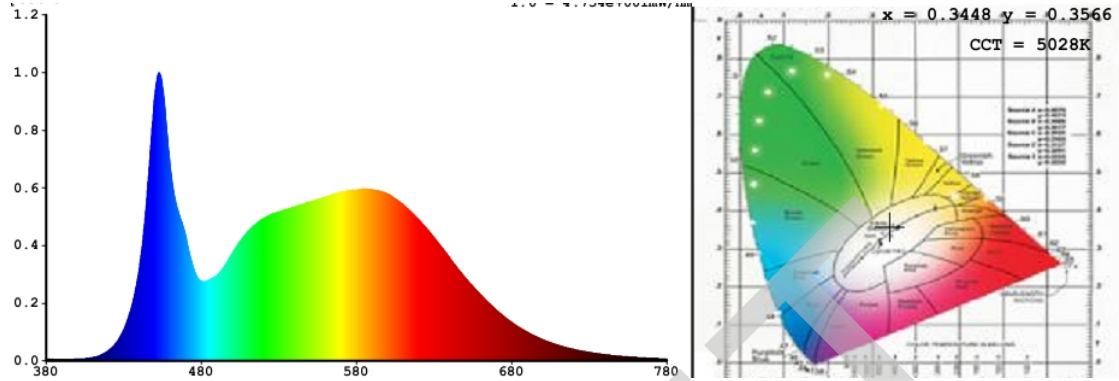

4.2 ANSI Chromaticity Quadrangles Diagram

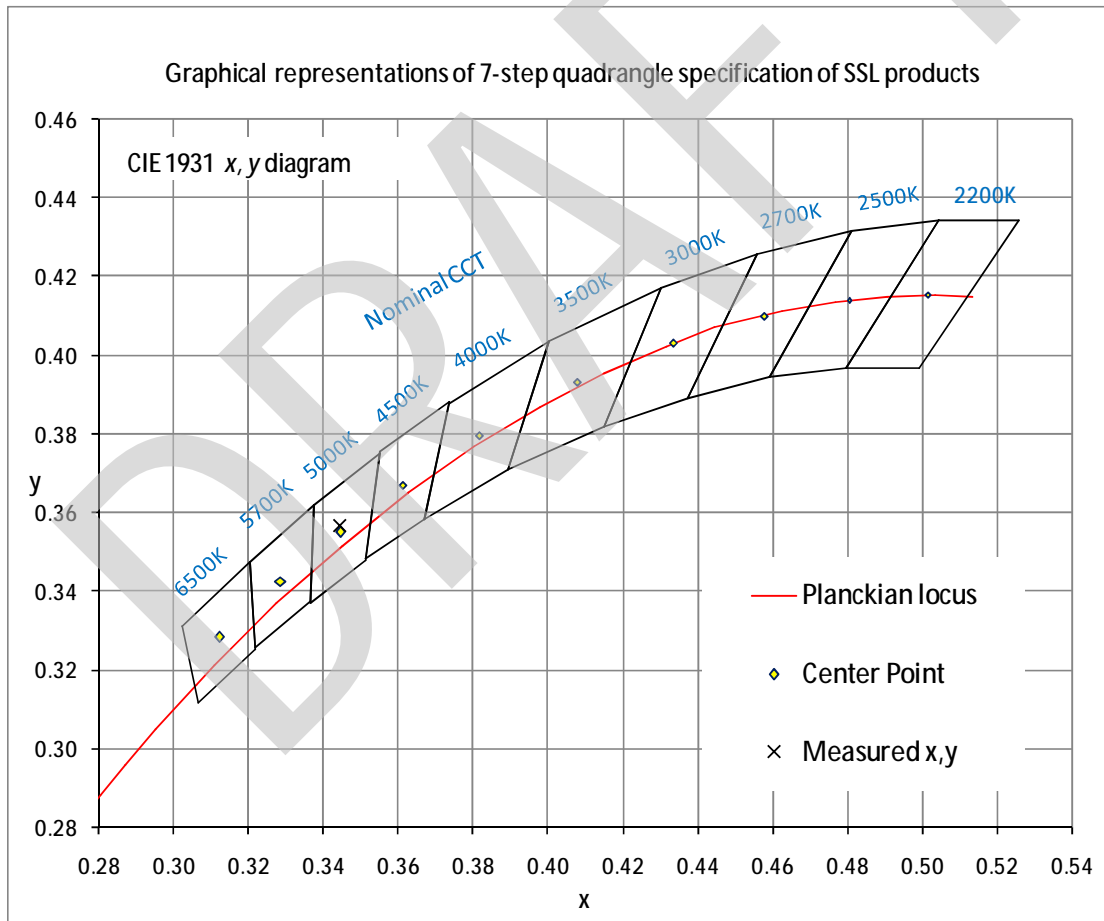



Appendix 1 Product Photo



Picture 1



Picture 2

****End of test report****